D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Notes:

1. Pitch:3.5mm ,Poles:2-22P
2. Rated voltage/current:UL 300V/8A
   VDE 250V/7A
3. Operation temperatures:-40℃～+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:28～16AWG,0.5-1.5mm²
7. Max.Torque Value:M2,2.04kgf.cm(1.77Lb.in)
8. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ / ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	0.05/10

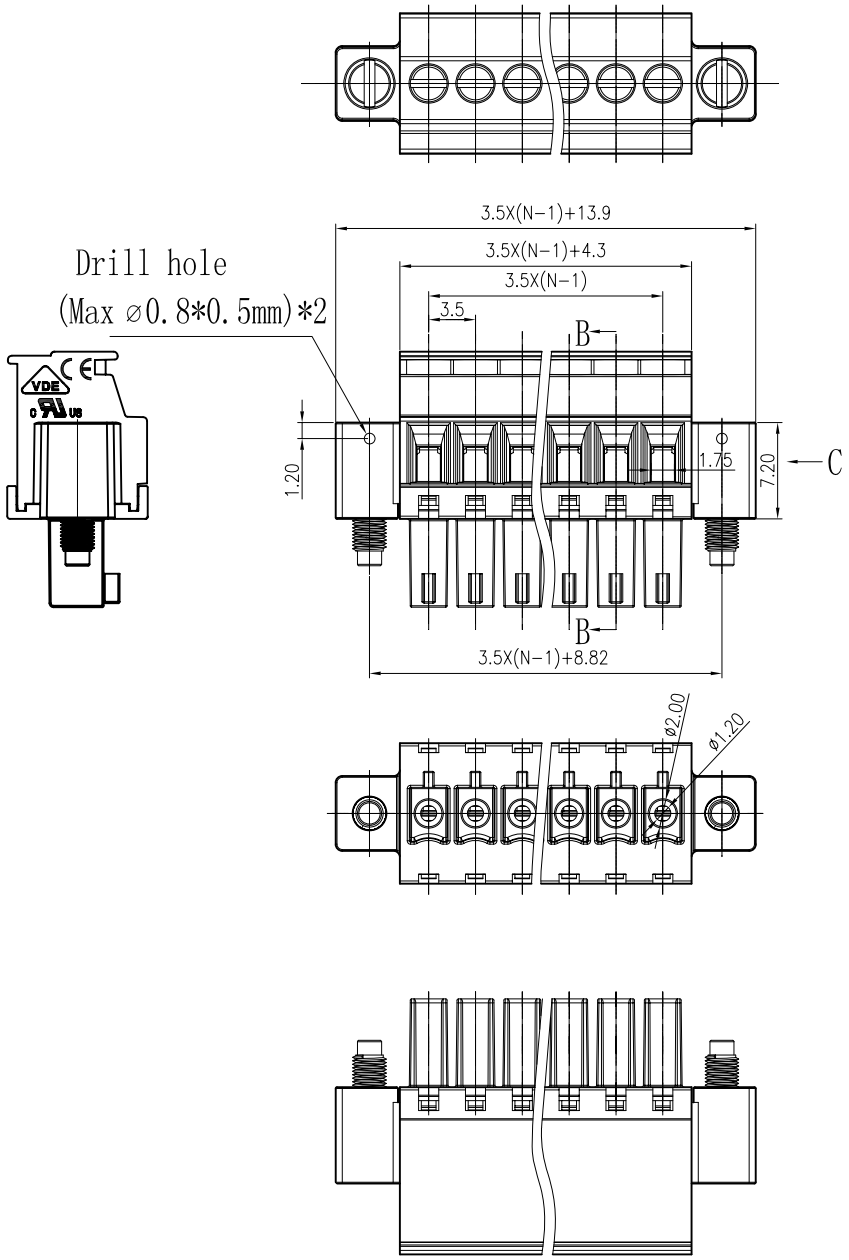

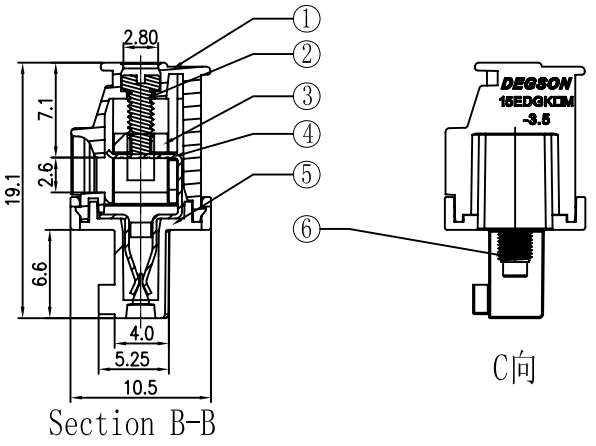

Section B-B

C向

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
6	2EDG Screw-M2.5	S000001370(H)	2	Steel	$Cr^{3+}Zn$
5	15EDGKA/B-3.5-100A-Cover	1033C0YXXE(H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020(H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010(H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360(H)	XX	Steel	$Cr^{3+}Zn$
1	15EDGKA/BM-3.5-100A-Housing	1034A0YXXE(H)	1	PA66	UL94V-0

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM
.0 ±
.00 ±
.000 ±
ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTO Apple	DATE 04/10/09"	
CHKD	DATE	
MFO	DATE	
APPVL	DATE	
MATERIAL :		
G.E :		
FINISH :		
SCALE : 1:1		

DEGSON®

宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
15EDGKAM-3.5-XXP-1Y-100A(H)

DRAWING NO. 15EDGKAM-3.5-E100
/PART NO.

SIZE A3

REV T0 09/10/09"

DO NOT SCALE DRAWING

SHEET 1 OF 1

8 7 6 5 4 3 2 1

H G F E D C B A