

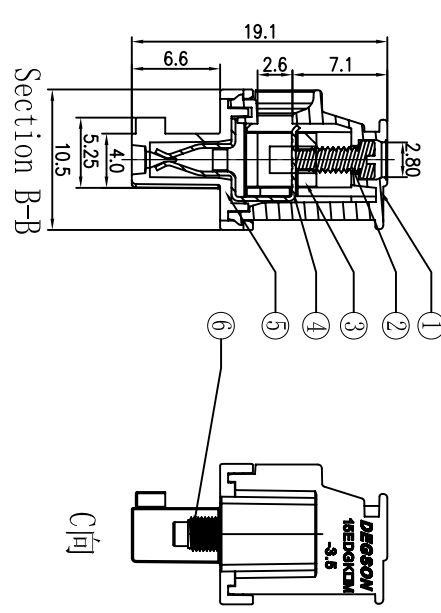
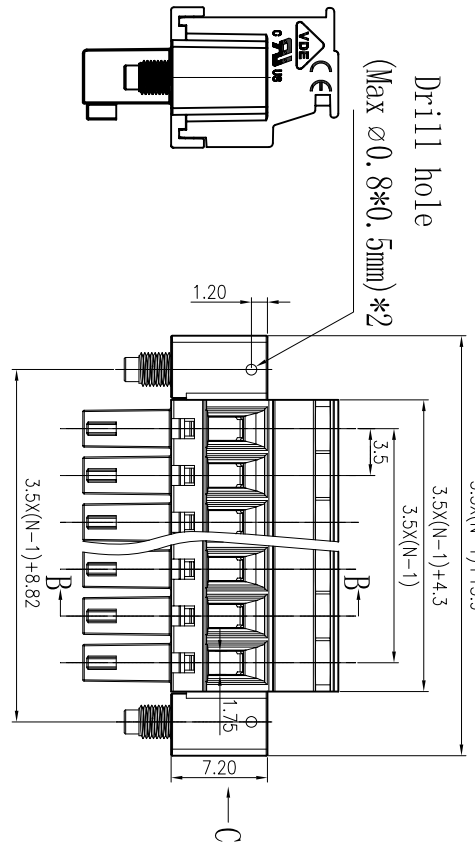


REVISION RECORD			
REV/ECO	DESCRIPTION	DRFT	DATE

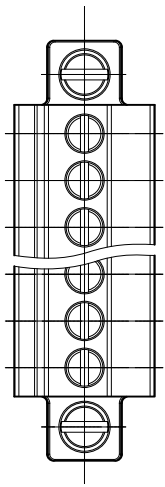

- Notes:
1. Pitch: 3.5mm , Poles: 2-22P
 2. Rated voltage/current: UL 300V/8A VDE 250V/7A
 3. Operation temperatures: -40°C ~ +105°C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ /DC1000V
 6. Wire Range: 28~16AWG, 0.5-1.5mm²
 7. Max. Torque Value: M2, 2.04kgf.cm (1.77lb. in)
 8. Undimensioned Tolerances:

Pitch	range in mm	Nominal dimension	range in mm
over	to	over	to
6	10	30	60
to	to	to	to
10	24	60	100
		to	150
			±1
±0.10	±0.15	±0.25	±0.2±0.3±0.5±0.7
			pos/0

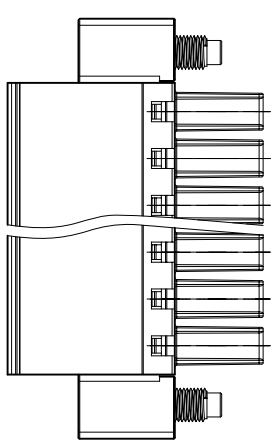

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
6	2EDG Screw-M2.5	S000001370(H)	2	Steel	Cr ³⁺ Zn
5	15EDGKA/B-3.5-100A-Cover	1033C0YXXE(H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-C1amp	1033B00020(H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010(H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360(H)	XX	Steel	Cr ³⁺ Zn
1	15EDGKA/BM-3.5-100A-Housing	1034A0YXXE(H)	1	PA66	UL94V-0

DETACHED LISTS			
MM	(INCH)	DATE	APP'D
0.1 ±	±	04/10/09*	Apple
0.00 ±	±		CHKD
0.00 ±	±		MFO
0.00 ±	±		DATE
0.00 ±	±		DATE

THIRD ANGLE PROJECTION		SCALE : 1:1	
FINISH :		DRAWING NO. 15EDGKAM-3.5-XXP-1Y-100A(H)	
G.E :		/PART NO.	
MATERIAL :		DO NOT SCALE DRAWING	
NAME 15EDGKAM-3.5-XXP-1Y-100A(H)		SHEET 1 OF 1	
DEGSON 宁波高臣电子有限公司		REV 10	
DEGSON ELECTRONICS CO.,LTD.		REV 10	
		REV 10	
		REV 10	

8 7 6 5 4 3 2 1