

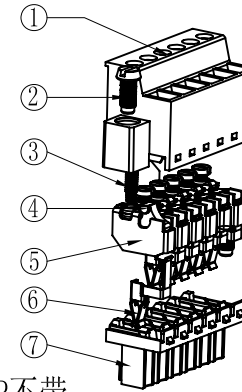

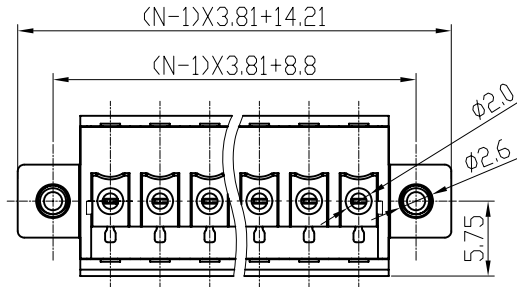


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		增加UL, CE刻字	HD	10/20/09*
△		图面更新	HD	11/06/09*



2P-6P带扣点, 7P-24P不带

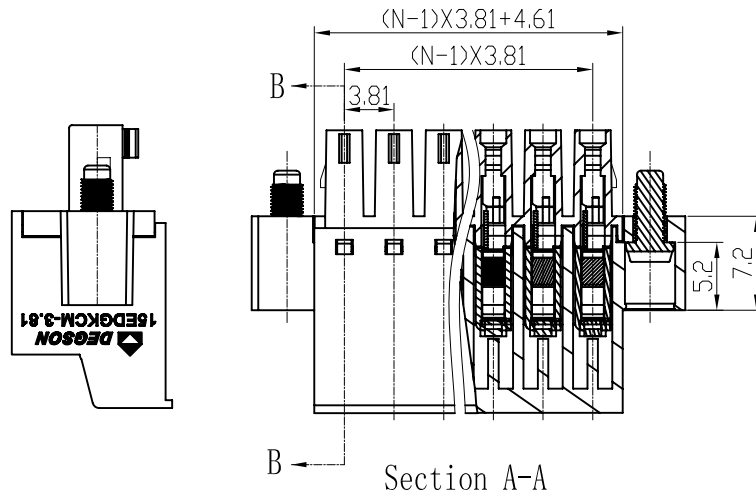


Section B-B

Notes:

- Pitch: 3.81mm, Poles: 2-24P
- Rated voltage/current: UL 300V/8A  
IEC 160V/8A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 30~16AWG, 1.5mm<sup>2</sup>
- Max. Torque Value: M2.0, 2.04Kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
to	over	to	over	to	over				
6	6	10	30	60	100	150	∩		
	to	to	to	to	to		□		
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	0.05/10

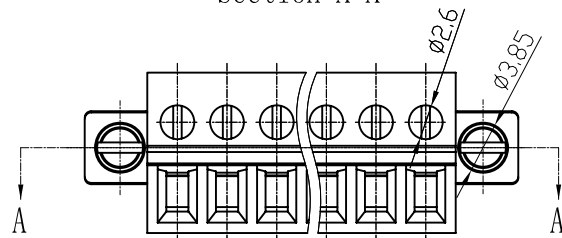

ITEM	DESCRIPTION	PART NO.	QTY	MATERIAL	FINISH
7	15EDGKC-3.81-Cover	1176COYXXA (H)	1	PA66	UL94V-0
6	15EDGKC-Clamp	1176B00010 (H)	XX	Phosphor bronze	SnCe plated
5	15EDGKC-Cage	X000002030 (H)	XX	Steel	Cr <sup>3+</sup> Zn
4	15EDGKC-Block	X000002040 (H)	XX	Steel	Cr <sup>3+</sup> Zn
3	15EDGKC-Screw-M2.0	S000002820 (H)	XX	Steel	Cr <sup>3+</sup> Zn
2	2EDG Screw-M2.5	S000001370 (H)	2	Steel	Cr <sup>3+</sup> Zn

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	15EDGKCM-3.81-Body	1177A0YXXA (H)	1	PA66	UL94V-0

DFTD Yangys	DATE 03/08/07*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
CHKD	DATE	
MFD	DATE	
APPL	DATE	
TOLERANCES EXCEPT AS NOTED		NAME 15EDGKCM-3.81-XXP-1Y-00A (H)
MM	±	
.00 ±	±	
ANGLES ± 1°		DRAWING NO. 15EDGKCM-3.81-E01 /PART NO.
THIRD ANGLE PROJECTION		
SCALE: 1:1		SIZE A3
DD NDT SCALE DRAWING		REV T2 11/06/09*
SHEET 1		OF 1