


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing Revise	Home	05/08/06
2		品名、料号增加环保标示(H)	LJH	12/10/07
3		修改料号及塑件增加防掉脱点	LJH	01/26/08
4		增加商标、品名及UL、CE刻字	Zengy	09/06/08
5		增加VDE刻字	Zengy	02/04/09
6		修改螺丝防脱卡点位置及尺寸	WLM	04/21/09

认证标志的位置在左右两边都可以  
(Approval mark can be printed on left and right end both)

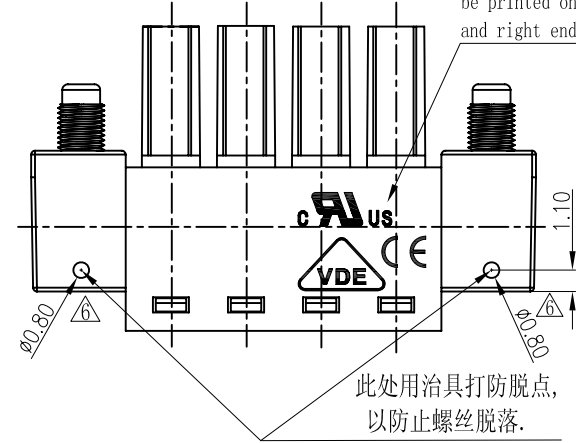

Notes:

1. Pitch: 3.5mm, Poles: 2-24P
2. Rated voltage/current: UL 300V/8A  
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28-16AWG, 0.5-1.5mm<sup>2</sup>
7. Max. Torque Value: M2, 2.04kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm					
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150
to 6	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5
				±0.7	±1.0	±0.06/0.10

ITEM	DESCRIPTION	PART NO.	QTY	MATERIAL	FINISH
6	2EDG "-"Screws	S000000980 (H)	2	steel	Cr <sup>3+</sup> Zn
5	15EDG "-"Screws	S000001360 (H)	XX	steel	Cr <sup>3+</sup> Zn
4	15EDG Brass cage	X000000010 (H)	XX	Brass	Ni plated
3	15EDG Clamp	1001B00010 (H)	XX	Phosphor Bronze	Ni plated
2	15EDGK-3.5 Cover	1001C0YXXA (H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	15EDGKM-3.5-Housing	1014A0YXXA (H)	1	PA66	UL94V-0

DFTO Zhuwm DATE 01/10/05 CHKD DATE MFO DATE APPVL DATE	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME <b>15EDGKM-3.5-XXP-1Y-00A (H)</b>
TOLERANCES EXCEPT AS NOTED .0 ± .00 ± .000 ±	MATERIAL : ANGLES ± 1° THIRD ANGLE PROJECTION
G.E : FINISH : SCALE : 1:1	DRAWING NO. 15EDGKM-3.5-E01 /PART NO. SIZE A3 REV T6 04/21/09
DO NOT SCALE DRAWING	SHEET 1 OF 1