

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- Rated voltage/current : 150V / 4A
- Withstanding voltage : AC1300V/1Min.

IEC Standard

1.







Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	5A

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 2.50mm, Poles : N=02~12P
- Operating temperature: -40°C~+130°C
- Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm					□	○
TO	Over	Over	TO	Over	Over	Over	0.1/10	
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

5.RoHS Compliance

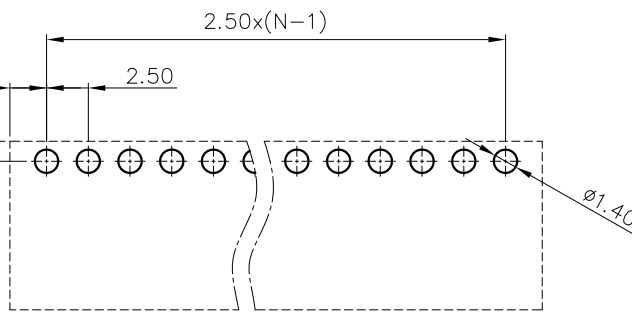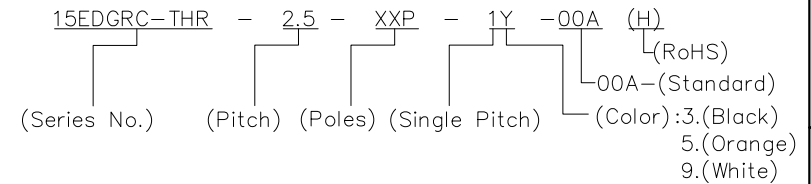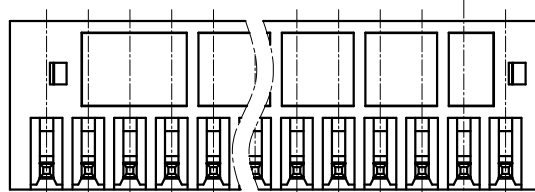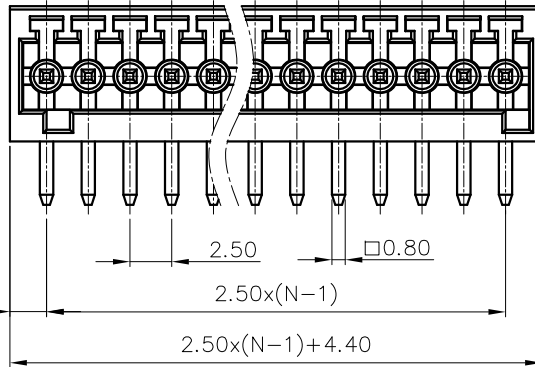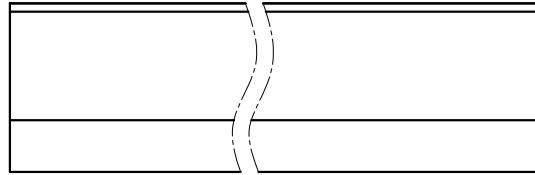

PCB LAYOUT

DETACHED LISTS	PART NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	/	NAME: 15EDGRC-THR-2.5-XXP-1Y-00A(H)		
	CHKD:	/	TITLE: CUSTOMER DRAWING		
	DRFT:	/	DRAWING NO.:		REV
		DO NOT SCALE DRAWING		SHEET	1/1
		MM (INCH)	SCALE	1:1	