


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加UL刻字	CSX	08/31/07	
△		增加VDE及参数刻字	LJH	02/10/09	

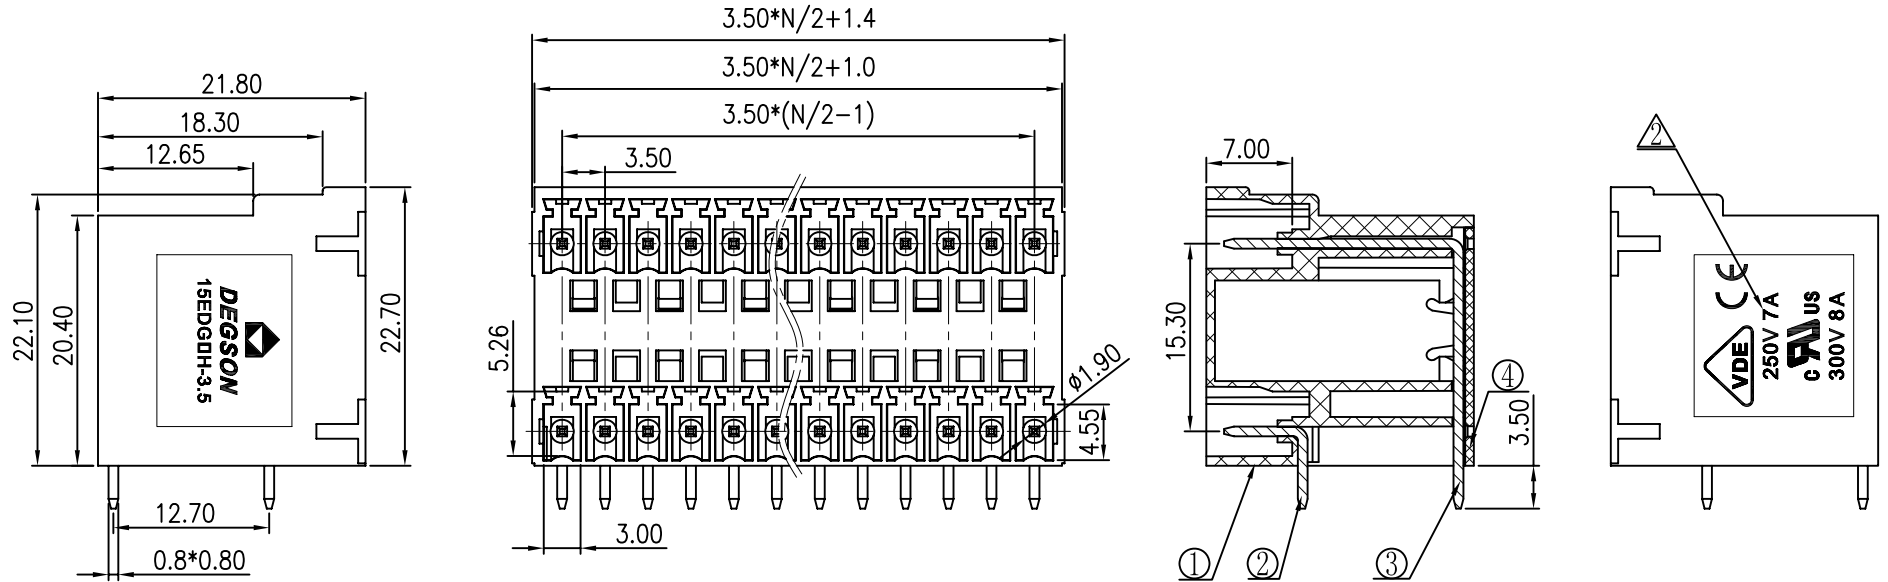

Notes:

1. Pitch: 3.5mm, Poles: 4-48P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm										
to	over	to	over	to	over	to	over					
6	6	10	10	30	30	60	60	100	100	150	150	
±0.10	±0.15	±0.25	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	15EDGV/RH-3.5-Cover	1063COYXXA (H)	1	PA66	UL94V-0
3	15EDGRH-Curve Pin	1063B00020 (H)	N/2	Brass	SnCe
2	15EDGRC-Pin	1003B00010 (H)	N/2	Brass	SnCe
1	15EDGV/RH-3.5-Housing	1063AOYXXA (H)	1	PA66	UL94V-0

MM (INCH)	DFTO	ExpsAny	DATE	09/30/05
TOLERANCES EXCEPT AS NOTED	CHKD		DATE	
	MFO		DATE	
	APPLY		DATE	
MM				
.0 ±				
.00 ±				
.000 ±				
ANGLES ± 1°	G. E :			
THIRD ANGLE PROJECTION	FINISH :			
	SCALE :	1:1		

DEGSON® 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
15EDGRH-3.5-XXP-1Y-00A (H)

DRAWING NO. 15EDGRH-3.5-E01 SIZE A3 REV T2
/PART NO. SHEET 1 OF 1

DO NOT SCALE DRAWING