
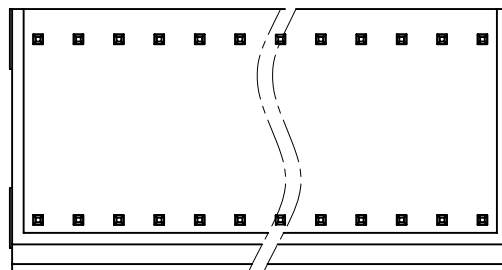


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	C SX	08/15/06
△		增加UL, CE刻字	Zengy	09/05/08
△		增加VDE及参数刻字	LJH	02/10/09

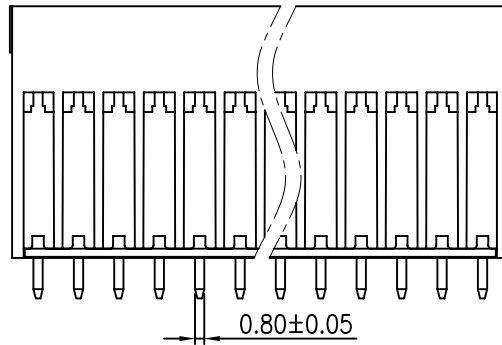

Notes:

1. Pitch: 3.81mm, Poles: 4-48P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to	over	over	over	over	over	over	
6	to 10	to 24	to 30	to 60	to 100	to 150	□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

3	15EDGV/RH-3.81-Cover	1064COYXXA (H)	1	PA66	UL94V-0
2	15EDGVH-Pin	1063B00030 (H)	XX	Brass	SnCe

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	15EDGV/RH-3.81-Housing	1064AOYXXA (H)	1	PA66	UL94V-0

MM (INCH)	DFTO	ExpsAny	DATE	02/21/06
TOLERANCES EXCEPT AS NOTED	CHKD		DATE	
MM	MFO		DATE	
.0 ±	APPL		DATE	
.00 ±				
.000 ±				
ANGLES ± 1°	G. E :			
THIRD ANGLE PROJECTION	FINISH :			
	SCALE :	1:1		

宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
NAME	
15EDGVH-3.81-XXP-1Y-00A (H)	
DRAWING NO.	15EDGVH-3.81-E01
SIZE	A3
REV	T3
	02/10/09
DO NOT SCALE DRAWING	
SHEET	1
OF	1