





VIEW C

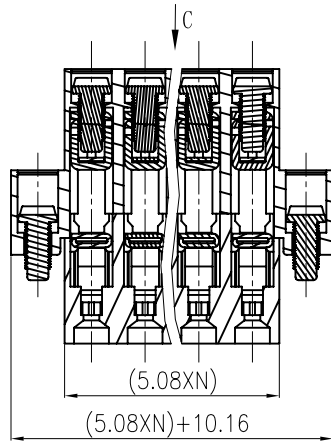


SECTION A-A




2.3

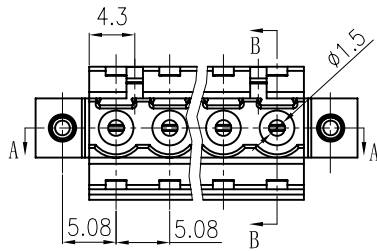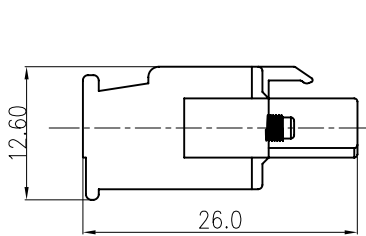

SECTION B-B

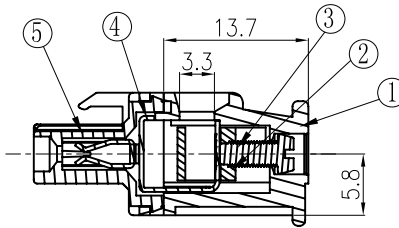


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing emend	CSX	04/18/06*
△		工程变更	CSX	11/30/06*
△		增加UL刻字	CSX	04/05/07*
△		品名、料号增加环保标示“(H)”	LJH	12/11/07*
△		增加VDE, CE刻字	WLM	02/12/09*
△	10-0105	更新图纸	COCO	05/05/10*

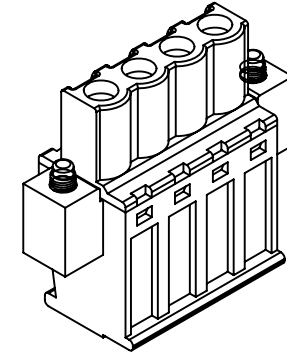

Notes:

1. Pitch:5.08mm ,Poles:2-22P
2. Rated voltage/current:UL 300V/15A
VDE 320V/10A
3. Operation temperatures:-45°C ~+105°C
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000Ω/DC1000V
6. Wire Range:28~12AWG, 2.5mm²
7. Max. Torque Value:M2.5, 4.08kgf. cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
to	over	over	over	over	over		
6	10	10	30	60	100	150	
		to	to	to	to	to	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

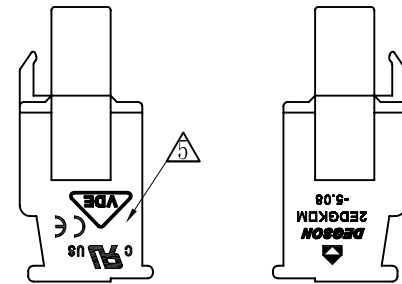

1	2EDGKAM/BM-5.08 HOUSING	1029A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	TOLERANCES EXCEPT AS NOTED MM (INCH) .00 ± () ± .00 ± () ± .000 ± () ±		DFTO WYP DATE 06/28/04" CHKD DATE MFO DATE APPVL DATE		
	ANGLES ± 1° THIRD ANGLE PROJECTION		MATERIAL : G.E : FINISH : SCALE :		
	NAME 2EDGKAM-5.08-XXP-1Y-00A(H)		DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	DRAWING NO. 2EDGKAM-5.08-E01 /PART NO.		SIZE REV T6 A3 05/05/10* DO NOT SCALE DRAWING SHEET 1 OF 1		

5	2EDGKA/B-5.08 COVER	1028C0YXXA (H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010 (H)	XX	Phoshor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980 (H)	△ XX+2	Steel	Cr ³⁺ Zn
2	DG128 CAGE	X000000020 (H)	XX	Brass	Ni plated