




REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面整理	Apple	04/07/08*



B向

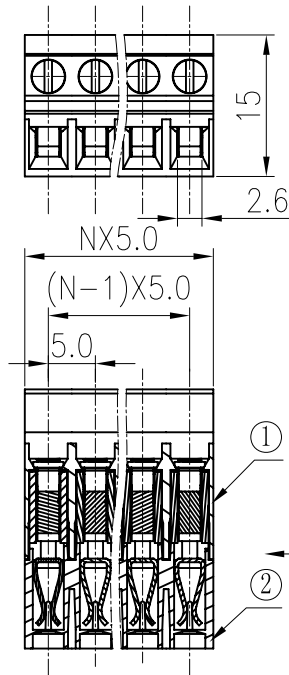

Section P-P

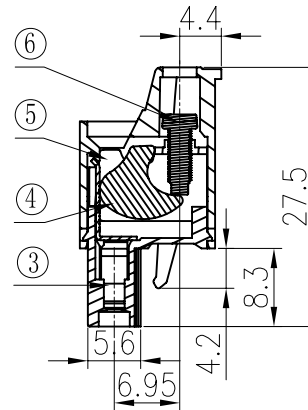

Section A-A

Notes:

1. Pitch: 5.0mm , Poles: 2-24P
2. Rated voltage/current: UL 300V/10A  
IEC 250V/20A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28~12AWG, 2.5mm<sup>2</sup>
7. Max. Torque Value: M2.5, 4.08Kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm										
to	over	to	over	to	over	to	to					
6	6	10	10	30	30	60	60	100	100	150	150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10				□

6	2EDGKC Screw-M2.5	S000002150 (H)	XX	Steel	Cr <sup>3+</sup> Zn
5	2EDGKC-Cage	X000001710 (H)	XX	Steel	Cr <sup>3+</sup> Zn
4	2EDGKC-Block	X000001720 (H)	XX	Steel	Cr <sup>3+</sup> Zn
3	2EDGKC-Clamp	1091B00010 (H)	XX	Phosphor bronze	SnCe plated
2	2EDGKC-5.0 Cover	1093COYXXA (H)	1	PA66	UL94V-0

1	2EDGKC-5.0 Housing	1093AOYXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Yangys	DATE 02/22/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: 2EDGKC-5.0-XXP-1Y-00A (H) DRAWING NO. 2EDGKC-5.0-E01 /PART NO. SIZE A3 REV T1 04/07/08* DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±	MATERIAL :			
.000 ±	ANGLES ± 1°	G.E. :			
	THIRD ANGLE PROJECTION	FINISH :			
		SCALE : 1:1			