



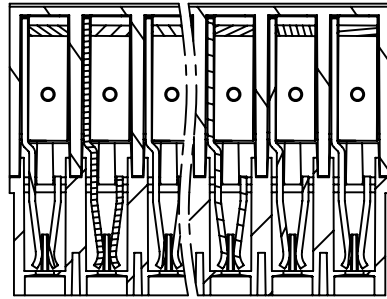

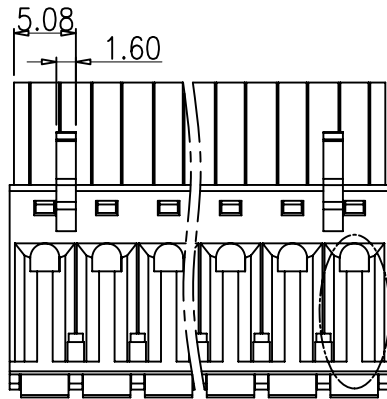
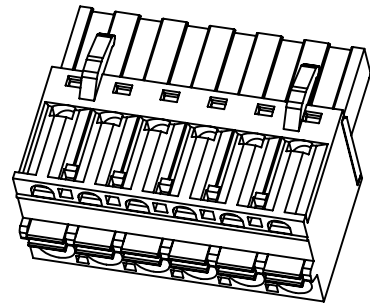
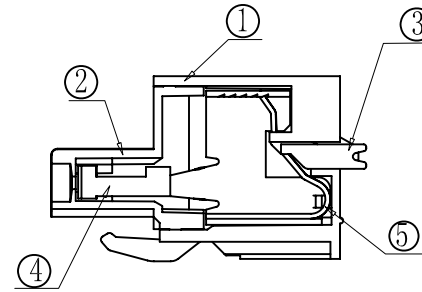


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	10-0266	修改外形	HXG	08/18/10*

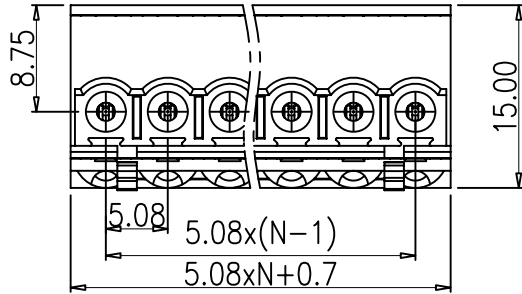

\*02P\*

\*03P\*

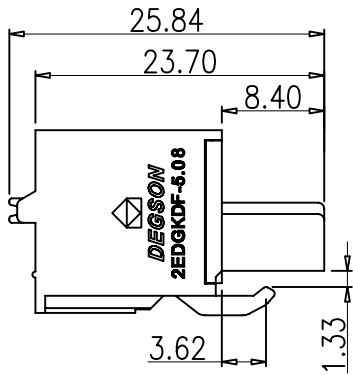

Notes:

1. Pitch:5.08mm Poles:2P-16P
2. Rated voltage/current:UL 300V/10A  
IEC 320V/20A
3. Operation temperatures:-40°C~+105°C
4. Withstanding Voltage:AC2500V/1min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:26~12AWG, 2.5mm<sup>2</sup>
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

5	2EDGKDF-5.08-Spring	X000004810 (H)	XX	Stainless steel	
4	2EDGKDF-5.08-Clamp	1219B00010 (H)	XX	Phosphor bronze	SnCe
3	2EDGKDF-5.08-Button	1085D0501A (H)	XX	PA66	UL94V-0
2	2EDGKDF-5.08-Cover	1219C0YXXA (H)	1	PA66	UL94V-0

1	2EDGKDF-5.08-Housing	1219A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →	DFTO HXG	DATE 02/16/09*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME 2EDGKDF-5.08-XXP-1Y-00A(H)	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
	MM	±	MATERIAL :	DRAWING NO. 2EDGKDF-5.08-E01	
	.0 ±	±	G.E :		
	.00 ±	±	FINISH :	/PART NO.	REV T1
	.000 ±	±	SCALE : 1:1	DO NOT SCALE DRAWING	08/18/10*
	ANGLES ± 1'			SHEET 1	OF 1
	THIRD ANGLE PROJECTION				