
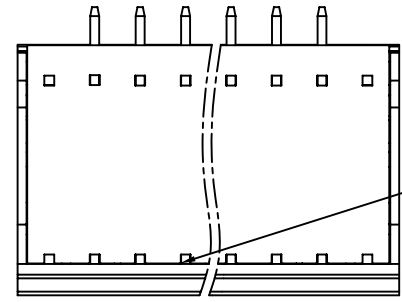

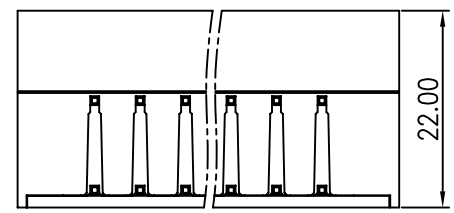
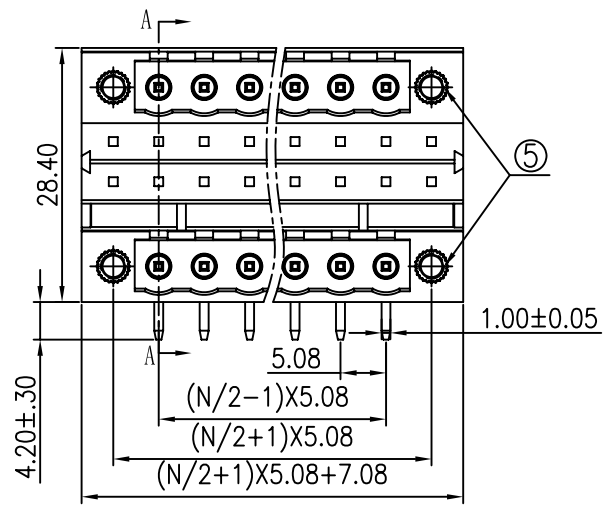
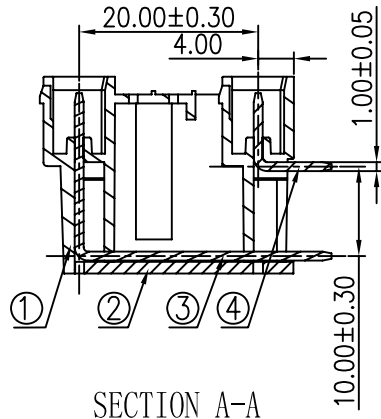


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加UL刻字	CSX	08/31/07
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加VDE刻字及参数	Zengy	12/11/08



注：盖与座需超音波焊接

Notes:

- Pitch: 5.08mm, Poles: 4-48P
- Rated voltage/current: UL 300V 15A
VDE 320V 10A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ / DC1000V
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	to	to	over	over	over		
6	10	24	30	60	100	150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

NO.	DESCRIPTION	QTY	MATERIAL	REMARKS
5	2EDGRH Screw	S000000040	4	Brass
4	2EDGRH Pin header (short)	1061B00030 (H)	XX/2	Brass SnCe
3	2EDGRH Pin header (long)	1061B00010 (H)	XX/2	Brass SnCe
2	2EDGRH-5.08 Cover	1062C0Y (XX+4) A (H)	1	PA66 UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	2EDGRHM-5.08 Housing	1077A0YXXA (H)	1	PA66	UL94V-0

DETTACHED LISTS	MM (INCH)	DFTO ZELIUM	DATE 06/24/06
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE
		MFO	DATE
		APPVL	DATE
	NAME	DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	MATERIAL :	2EDGRHM-5.08-XXP-1Y-00A(H)	
	ANGLES ± 1'	G.E. :	
	FINISH :	DRAWING NO. 2EDGRHM-5.08-E01	SIZE A3
	THIRD ANGLE PROJECTION	/PART NO.	REV T3 12/11/08
	SCALE : 1:1	DO NOT SCALE DRAWING	SHEET 1 OF 1