


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△	10-0176	增加VDE刻字	Jordan.Y	06.09.10*
△	10-0273	修改外形避专利	HD	08.20.10*
△	10-0311	增加VDE刻字	HD	09.17.10*

Notes:

- pitch:10.16mm, ploes:2-8p
- Rated current/voltage:
UL 52A/600V
VDE 57A/600V
- Operation temperatures:-40° ~+105°
- Withstanding Voltage:AC3500V/1Min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range:20°6AWG, 0.5-10mm²
- Torque Value:12.24 kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm				
to	over	to	over	over	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7
						±1.0 0.05/10

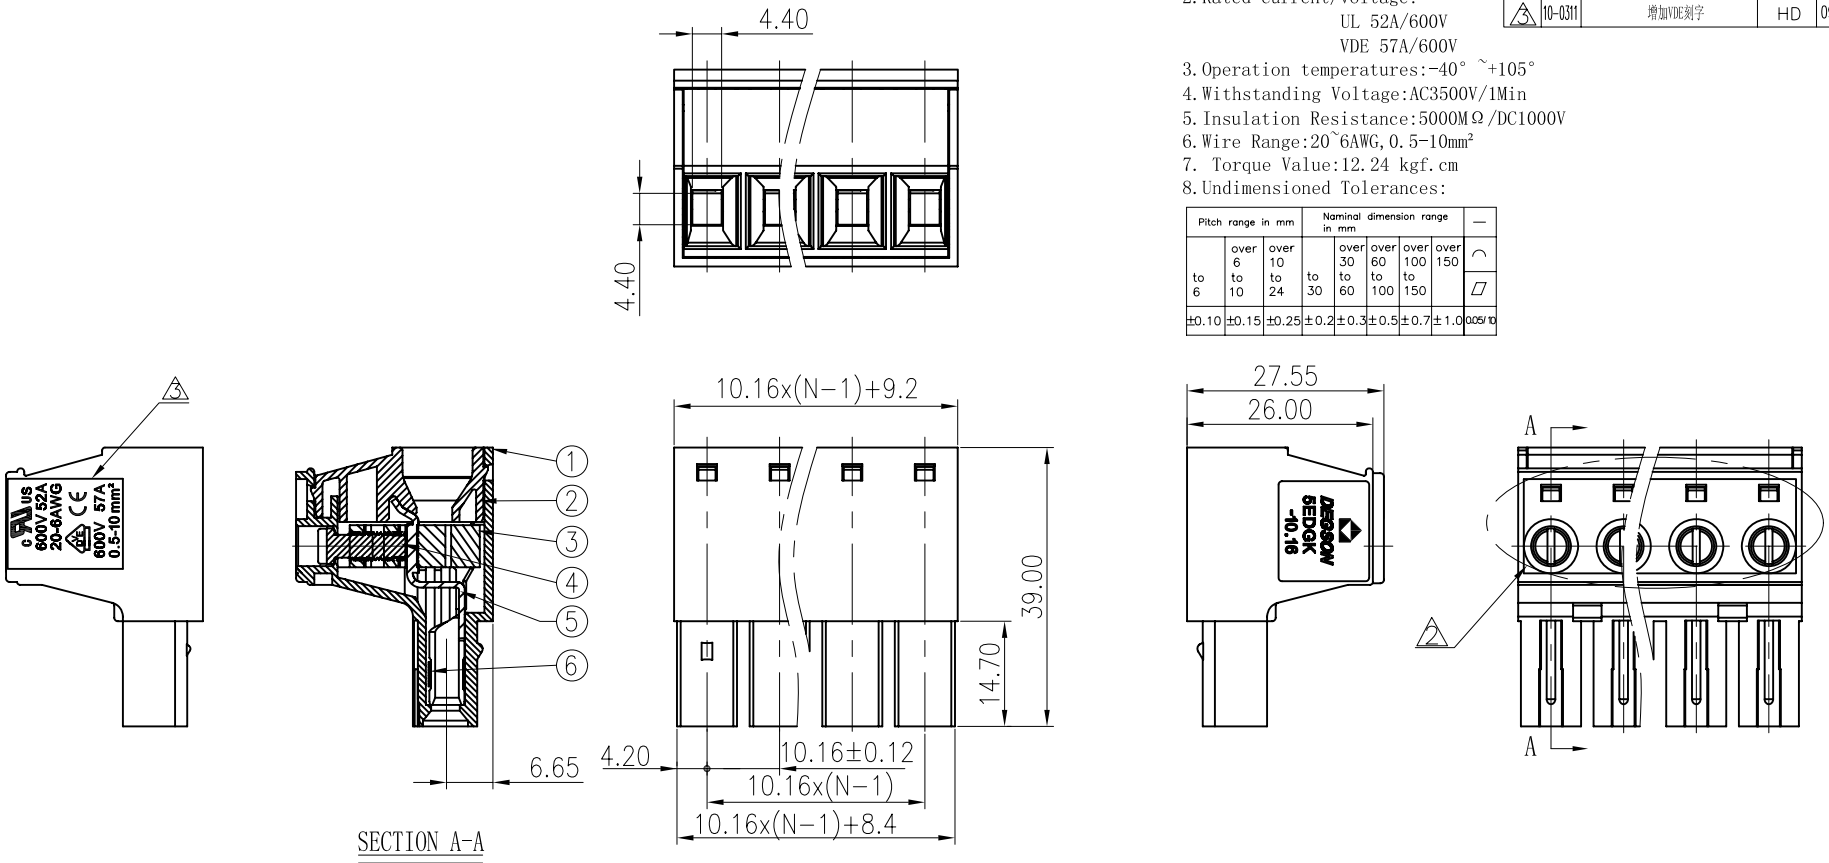

5	5EDGK-10.16-Clamp	1192B00010 (H)	XX	Copper	Ag plated
4	PC6-Screw	S000001490 (H)	XX	Brass	Ni plated
3	PC6-Brass Cage	X000000900 (H)	XX	Brass	Ni plated
2	5EDGK-10.16-Cover	1192C0YXXA (H)	1	PA66	UL94V-0
1	5EDGK-10.16-Housing	1192A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

MM (INCH)	DFTO Zhwm	DATE 09/05/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
TOLERANCES EXCEPT AS NOTED	CHKD	DATE			
MM	MFO	DATE	NAME 5EDGK-10.16-XXP-1Y-00A(H)		
.0 ±	APPL	DATE			
.00 ±	MATERIAL :		DRAWING NO. 5EDGK-10.16-E01		
.000 ±	G.E :				
ANGLES ± 1°	FINISH :		SIZE A3		
THIRD ANGLE PROJECTION		SCALE : 1:1			
DO NOT SCALE DRAWING			SHEET 1 OF 1		

6	5EDGK-10.16-Spring	X000003190 (H)	XX	Stainless steel
---	--------------------	----------------	----	-----------------

H
G
F
E
D
C
B
A