







REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加UL刻字	Zengy	09/06/08*	
△		边件1中间件1/2改模	HXG	01/09/09*	
△	10-0305	增加VDE, CE刻字及参数	Jordan, Y	09/06/10*	

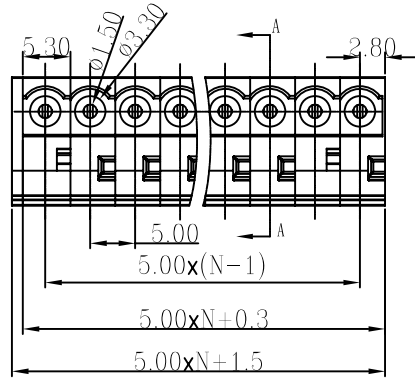

*02P



*03P

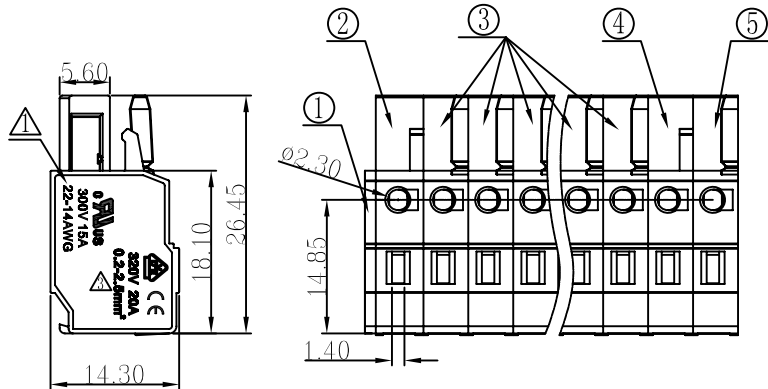

Notes:

- Pitch: 5.0mm, Poles: XXP
- Rated voltage/current: UL 300V/15A
VDE 320V/20A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ / DC1000V
- Wire Range: 22~14AWG, 2.5mm²
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	over	over	over	over	over		
6	6	10	30	60	100	150	∅	
6	10	24	30	60	100	150	∇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	DG242-SPRING	X000000990 (H)	XX	Stainless Steel	
6	8EDGK-CLAMP	1086B00010 (H)	XX	Phosphor Bronze	Tin plated
5	8EDGK-5.0-HOUSING (边件2)	1086A4101C (H)	1	PA66	UL94V-0
4	8EDGK-5.0-HOUSING (中间件2)	1086A4101B (H)	1, (XX≥4) 0, (XX≤3)	PA66	UL94V-0
3	8EDGK-5.0-HOUSING (中间件1)	1086A4101A (H)	XX-3, (XX≥4) XX-2, (XX≤3)	PA66	UL94V-0

2	8EDGK-5.0-HOUSING (边件1)	1086A4101D (H)	1	PA66	UL94V-0
1	8EDGK-5.0-COVER (盖板)	1086C4101A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
NAME		8EDGK-5.0-XXP-11-01A (H)			
DRAWING NO.		8EDGK-5.0-E02		SIZE	REV
/PART NO.				A4	T3
				09/06/10*	
SCALE: 1:1				DO NOT SCALE DRAWING	
SHEET 1				OF 1	