

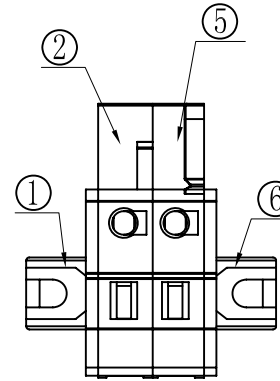





REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加商标品名及UL, CE刻字	HD	10/21/09*	

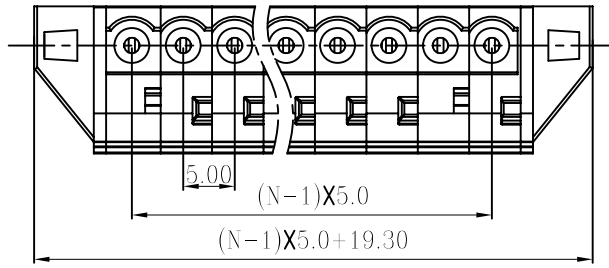

\*02P

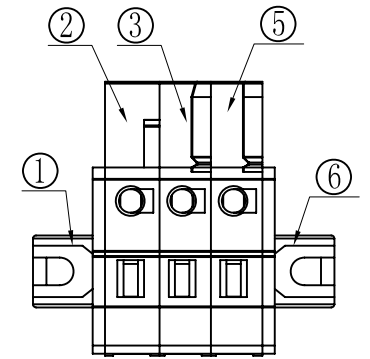

\*03P

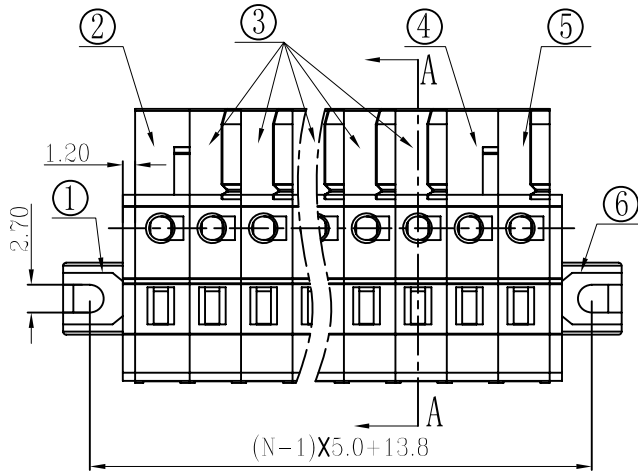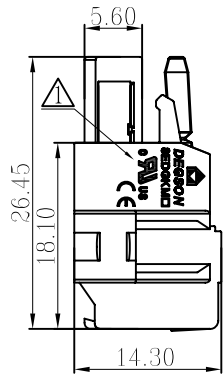


SECTION A-A

Notes:

1. Pitch: 5.00mm
2. Rated voltage/current: UL 300V/15A  
IEC 320V/20A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28~12AWG, 2.5mm<sup>2</sup>
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩		
to	6	24	30	60	100	150	◇		
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	0.05/10

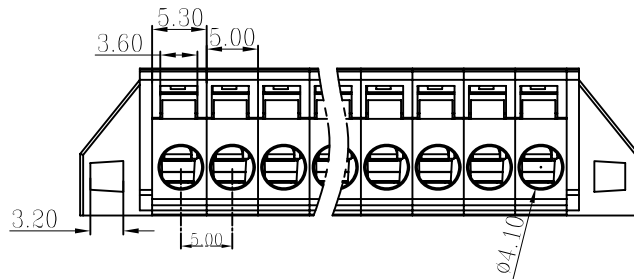

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
8	DG242-SPRING	X00000990	XX	Stainless Steel	
7	8EDGK-CLAMP	1086B00010	XX	Phosphor Bronze	Tin plated
6	8EDGKMA-5.0-COVER-2	1086C4101C	1	PA66	UL94V-0
5	8EDGK-5.0-HOUSING (边件2)	1086A4101C	1	PA66	UL94V-0
4	8EDGK-5.0-HOUSING (中间件2)	1086A4101B	1	PA66	UL94V-0
3	8EDGK-5.0-HOUSING (中间件1)	1086A4101A	1	PA66	UL94V-0

2	8EDGK-5.0-HOUSING (边件1)	1086A4101D	1	PA66	UL94V-0
1	8EDGKMA-5.0-COVER-1	1086C4101B	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO LYK		DATE 05/21/07*	
MM (INCH)		CHKD		DATE	
.0 ±		MFO		DATE	
.00 ±		APPVL		DATE	
.000 ±					
ANGLES ± 1°		G.E :			
THIRD ANGLE PROJECTION		FINISH :			
		SCALE :		DO NOT SCALE DRAWING	

宁波高正电子有限公司  
DEGSON ELECTRONICS CO., LTD

NAME  
**8EDGKMA-5.0-XXP-11-01A**

DRAWING NO. 8EDGKMA-5.0-E01      SIZE A4      REV T1 10/21/09\*

/PART NO.

SHEET 1 OF 1