
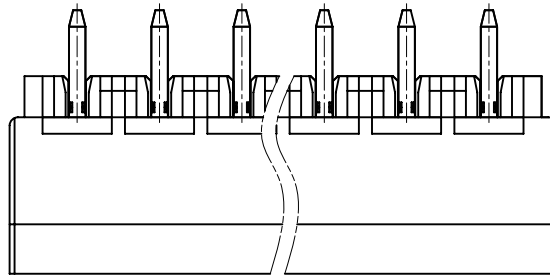








REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	10-0325	增加“VDE”刻字	Jishai.Lan	09/29/10*

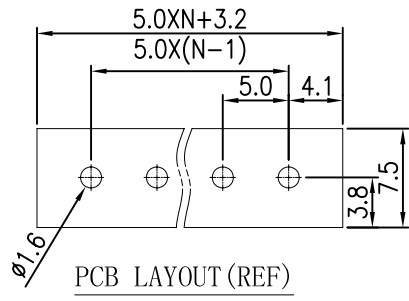

Notes:

1. Pitch: 5.0mm , Poles: 2-24P
2. Rated voltage/current: UL 300V/15A VDE 320V/20A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	over	over			
6	10	10	30	60	100	150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

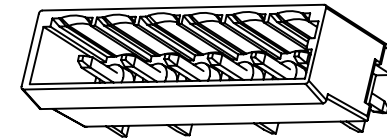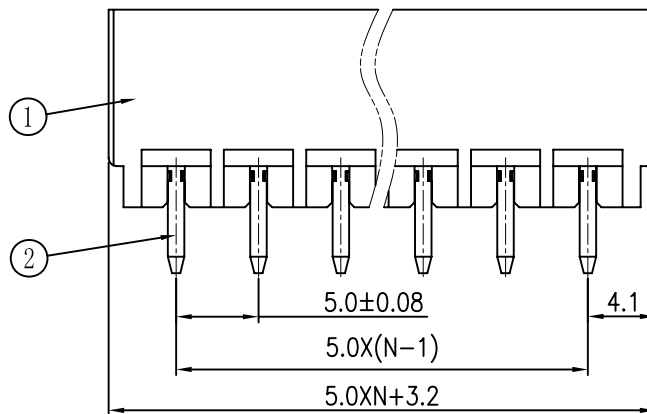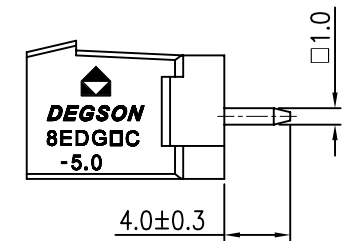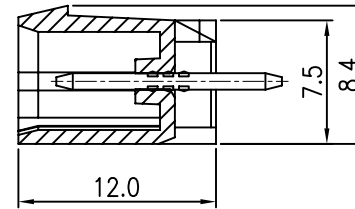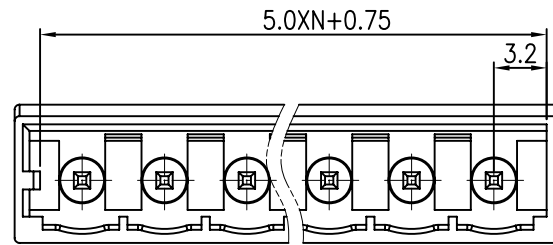

2	2EDGV-Pin header	1007B00030 (H)	XX	Brass	SnCe plated
1	8EDGVC-5.0 Housing	1089A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO Lasting	DATE 09/21/10*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
	MM	±	MATERIAL :	NAME	
	.0 ±	±		8EDGVC-5.0-XXP-1Y-00A(H)	
	.00 ±	±		DRAWING NO. 8EDGVC-5.0-E03	SIZE A3
	.000 ±	±		/PART NO.	REV T1
	ANGLES ± 1°	G.E :		DO NOT SCALE DRAWING	09/29/10*
	THIRD ANGLE PROJECTION	FINISH :		SHEET 1	OF 1
		SCALE : 1:1			