
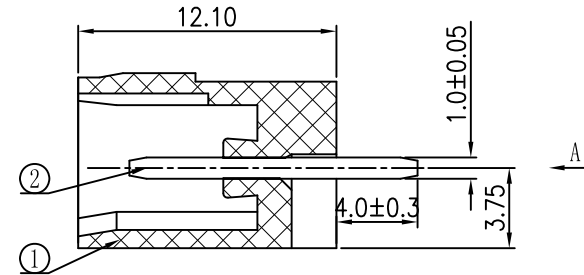



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		Drawing emend	HXG	11/03/08*
△	10-0312	增加“VDE”认证标志	Jinhai.Lan	09/04/10*

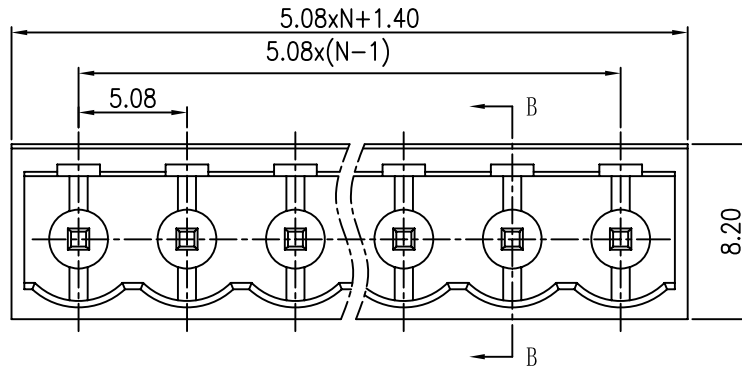



SECTION B-B

Notes:

- poles: 2-24p pitch: 5.08mm
- Rated voltage/current: UL 300V/15A  
VDE 320V/20A △
- Withstanding voltage: AC2000V/1min
- Insulation resistance: 5000MΩ/DC1000V
- Temp. Range: -40° C~+110° C
- Undimensioned Tolerances:

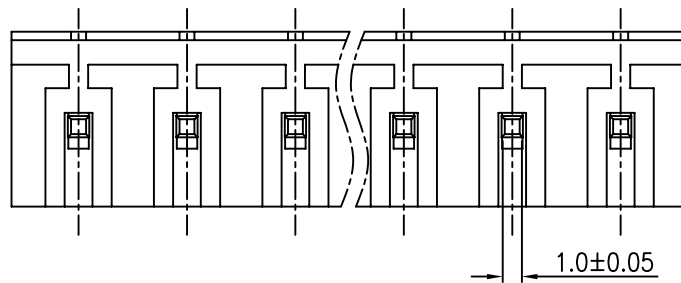

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10		over 6	over 30	over 90	over 200	∩
to 6	to 10	to 24	to 6	to 30	to 90	to 200	to 480	□
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

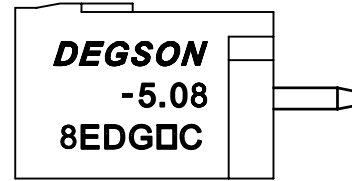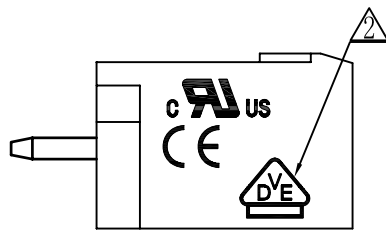

2	2EDGV-Pin header	1007B00030 (H)	XX	Brass	SnCe
1	8EDGVC-5.08 Housing	1121A41XXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO HXG	DATE 10/04/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME 8EDGVC-5.08-XXP-11-01A (H) DRAWING NO. 8EDGVC-5.08-E02 SIZE A3 REV T2 09/04/10* /PART NO. SCALE: 1:1 DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED		CHKD DATE		
			MFO DATE		
			APPVL DATE		
			MATERIAL:		
ANGLES ± 1°		G.E.:			
THIRD ANGLE PROJECTION		FINISH:			