


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	10-0186	增加UL刻字	Lasting	07/15/10*

Notes:

- Pitch:7.5mm , Poles:1-XXP
- Rated voltage/current:UL 300V/12A
VDE 250V/24A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC2000V/1Min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range:24~14AWG, 0.5~2.5mm²
- Max. Torque Value:M2.5 , 4.08Kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm			—			
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	□		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/10

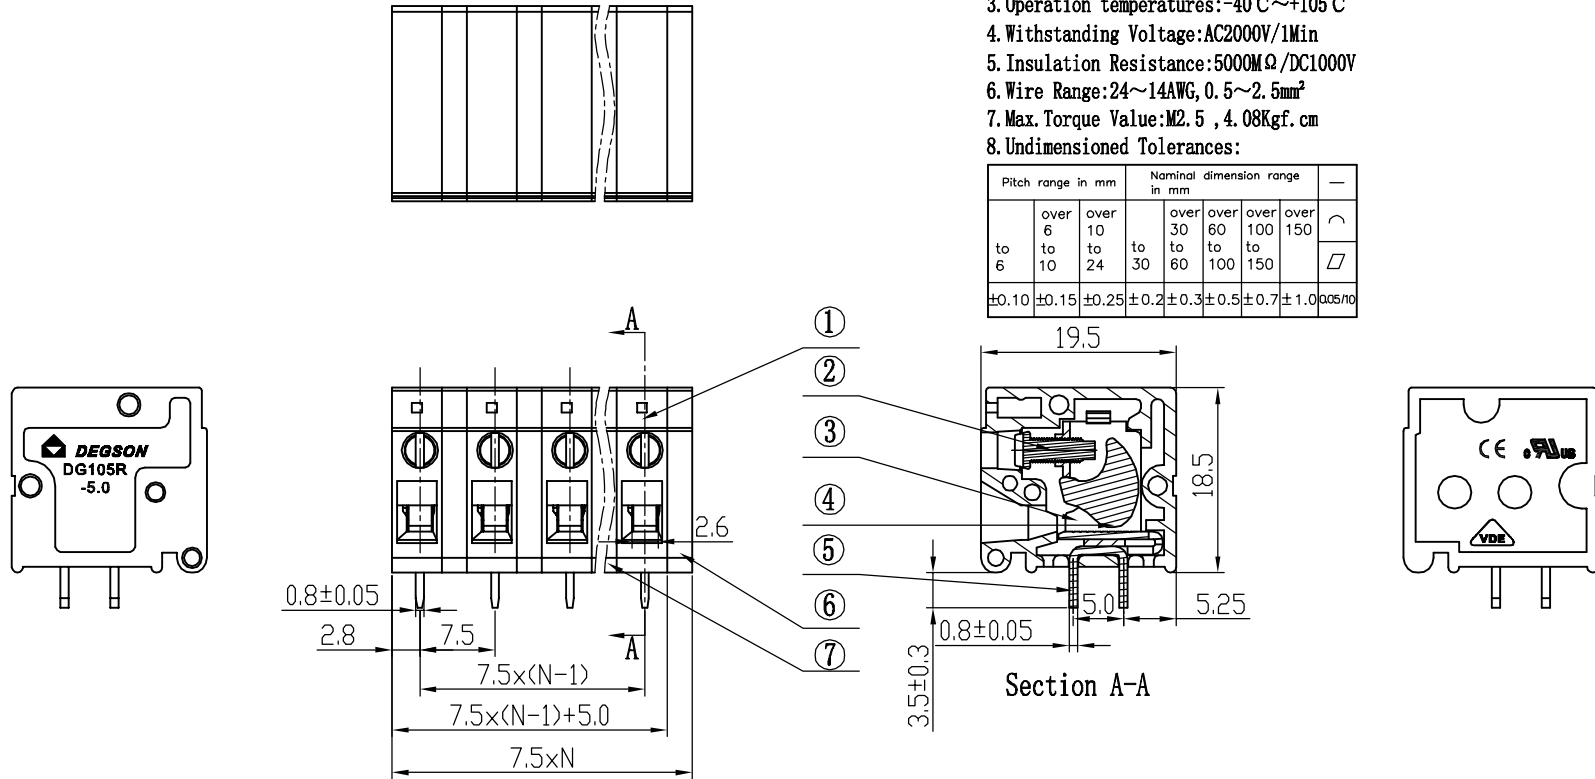

7	DG105R-Calpboard	4090HOY01A (H)	XX-1	PA66	UL94V-0
6	DG105R-Cover	4090COY01A (H)	1	PA66	UL94V-0
5	DG105R-5.0-Pin header	4090BO0010 (H)	XX	Copper	SnCe plated
4	2EDGKC-Block	X000001720 (H)	XX	Steel	Cr ³⁺ Zn

3	2EDGKC-Cage	X000001710 (H)	XX	Steel	Cr ³⁺ Zn
2	2EDGKC Screw-M2.5	S000002150 (H)	XX	Steel	Cr ³⁺ Zn
1	DG105R-5.0	4090AOY01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 10/07/08*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
MM	±	CHKD	DATE	NAME DG105R-7.5-XXP-1Y-00A (H)	
.0 ±	±	MFD	DATE	DRAWING NO. DG105R-7.5-E01	
.00 ±	±	APPVL	DATE	/PART NO.	
.000 ±	±	MATERIAL :	DO NOT SCALE DRAWING		
ANGLES ± 1°		G.E :	SHEET 1 OF 1		
THIRD ANGLE PROJECTION		FINISH:	SCALE : 1:1		