
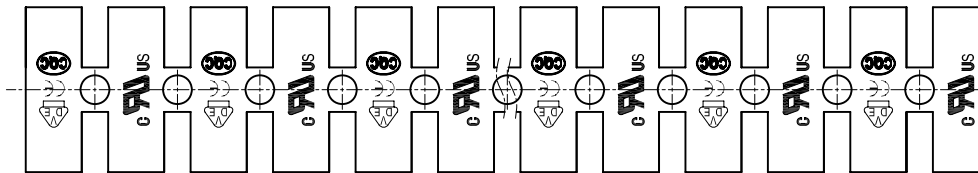
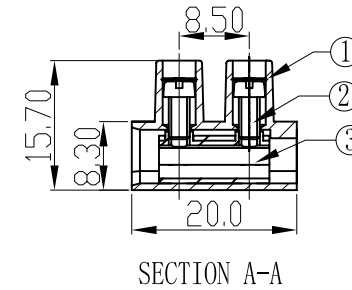
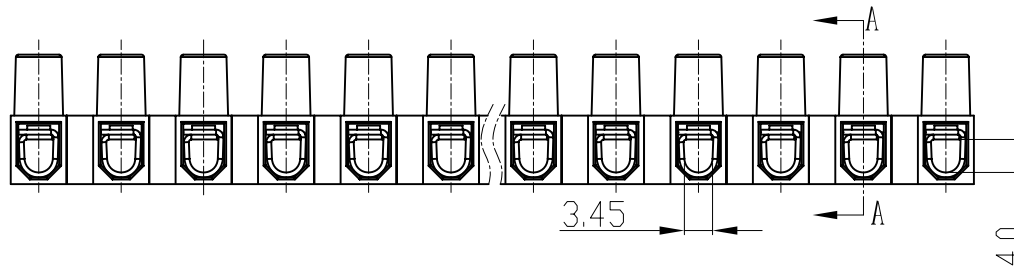


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		更改电流参数	HYQ	06/09/09

Notes:

- Pitch:10.0, Poles:2-12P
- Rated voltage/Current:UL 300V/30A △
VDE 450V/41A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC2000V/1Min
- Insulation Resistance:5000MΩ/DC1000V
- Wier Range:18-12AWG, 1-6mm²
- Max. Torque Value:M3, 5.1kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm				
to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	∩ ∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±1.0

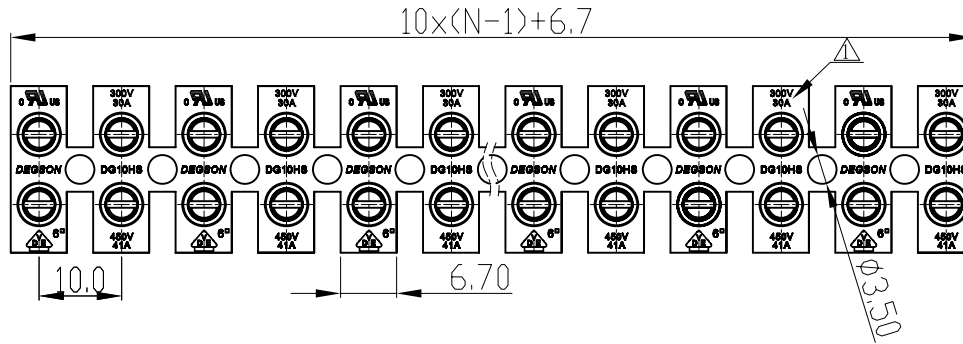

3	DG10HS-Current carrier	X000002130 (H)	XX	Steel	Cr ³⁺ Zn
2	DG10HS"-Screw	S000003000 (H)	XX*2	Steel	Cr ³⁺ Zn

1	DG10HS-0 Housing	2029A0YXXA (H)	1	PA66	UL94V-2	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	MM (INCH)	DF TO VLM	DATE 12/17/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG10HS-0-XXP-1Y-100A(H) DRAWING NO. DG10HS-0-E02 /PART NO. SIZE A4 REV T1 06/09/09*		
	TOLERANCES EXCEPT AS NOTED		CHKD			DATE
			MFD			DATE
			APPVL			DATE
			MATERIAL :			
ANGLES ± 1°		G.E :		SCALE : 1:1		
THIRD ANGLE PROJECTION		FINISH:		DD NDT SCALE DRAWING		
			SHEET 1		OF 1	