
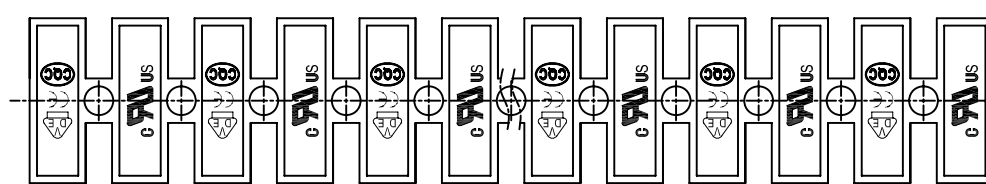

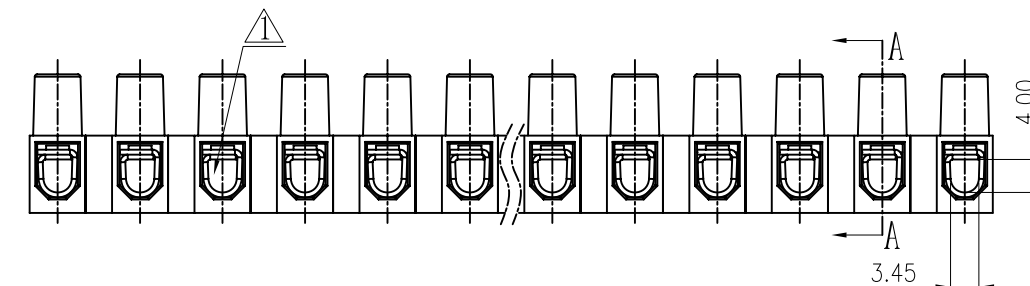


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		工程变更, 去掉挡线板	Zengy	07/21/08
△		品名中加上塑件底高"1.2"	Zengy	09/09/08
△		增加VDE线径刻字	Zengy	09/27/08
△		修改品名中"10A"为"100A"	LJH	11/01/08
△		增加参数及刻字	LJH	02/12/09

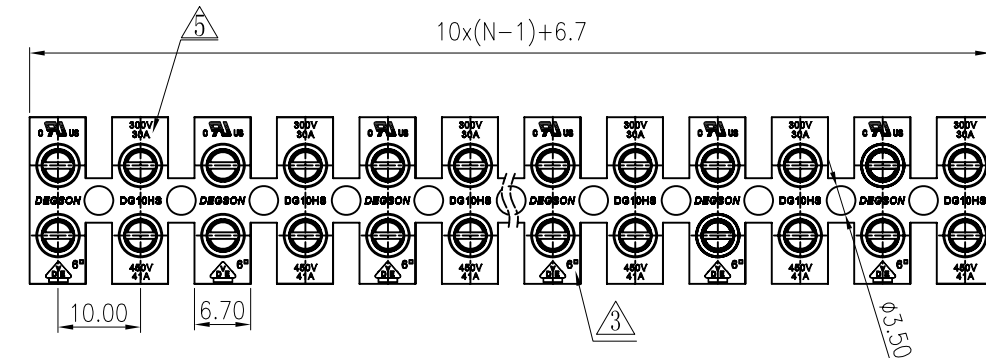

- Notes:
- Pitch:10.0, Poles:2-12P
 - Rated voltage/Current:UL 300V 30A △
VDE 450V 41A
 - Operation temperatures:-40℃~+105℃
 - Withstanding Voltage:AC2000V/1Min
 - Insulation Resistance:5000MΩ/DC1000V
 - Wier Range:18-10AWG, 1-6mm²
 - Max. Torque Value:M3, 5.1kgf.cm
 - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
	over 6	over 10	to 30	over 30	over 60	over 100	over 150	∩	
to 6	to 10	to 24	to 30	to 60	to 100	to 150		∇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	DG10HS-Current carrier	X000002130 (H)	XX	Steel	Cr ³⁺ Zn
2	DG10HS"-Screw	S000003000 (H)	XX*2	Steel	Cr ³⁺ Zn
1	DG10HS-1.2- Housing	2023A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
	DF TO LIN	DATE 02/22/08	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: DG10HS-1.2-XXP-1Y-100A (H) DRAWING NO. DG10HS-E06 /PART NO.		
	CHKD	DATE			
	MFD	DATE			
	APPL	DATE			
TOLERANCES EXCEPT AS NOTED		MATERIAL :		SIZE	
MM	±	G.E :		A4	REV T5
.0 ±	±	FINISH:			02/12/09
.00 ±	±	SCALE : 1:1		DD NDT SCALE DRAWING	SHEET 1 OF 1
.000 ±	±				
ANGLES ± 1°					
THIRD ANGLE PROJECTION					