

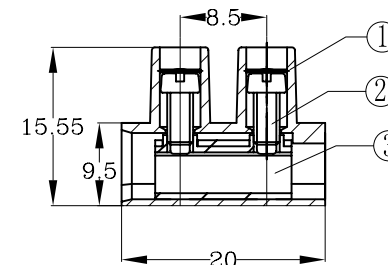
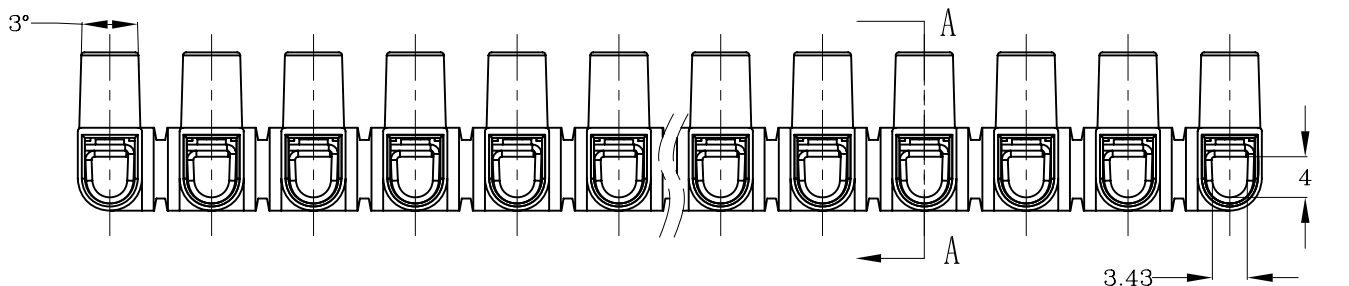


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		00A改为300A	LIN	12/03/08*
△		增加VDE刻字	Zengy	04/25/09*

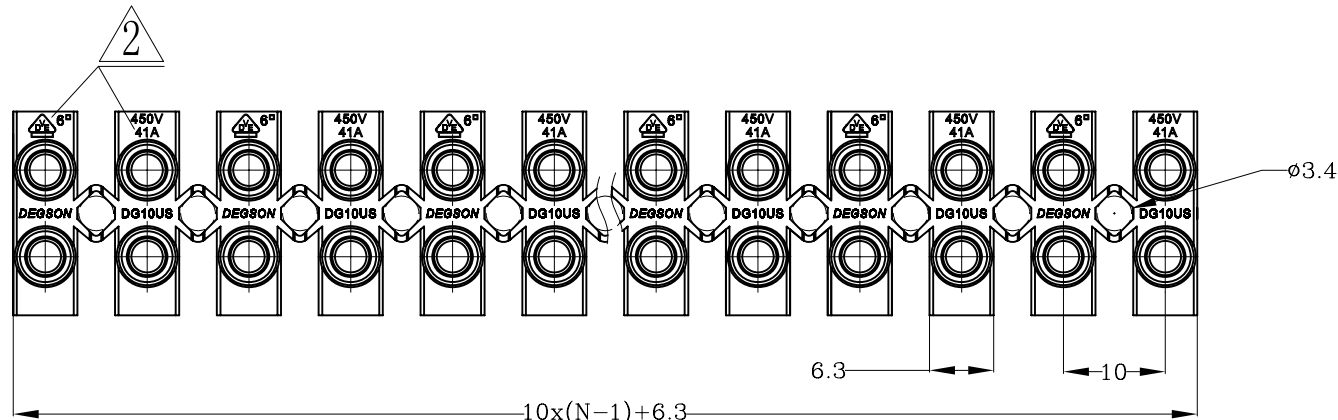

SECTION A-A

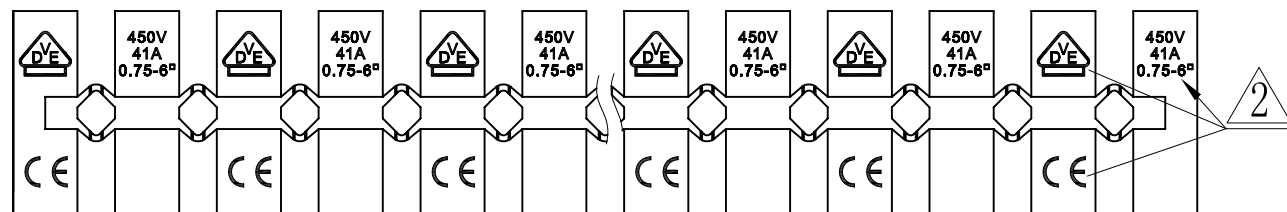

Notes:

- Pitch: 10.0, Poles: 12P
- Rated voltage/Current: UL1059 300V 20A  
VDE 450V 41A
- Operation temperatures: -5°C ~ +80°C
- Withstanding Voltage: AC2500V/1min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 18-12AWG, 0.75-6mm<sup>2</sup>
- Max. Torque Value: M3, 5.10kgf.cm
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6	over 10		over 30	over 60	over 100	over 150	⌒
to 6	to 10	to 24	to 30	to 60	to 100	to 150		∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	DG10HS-Current carrier	X000002130 (H)	XX	Steel	Cr <sup>3+</sup> Zn
2	DG10HS"-Screw	S000003000 (H)	XX*2	Steel	Cr <sup>3+</sup> Zn

1	DG10US Housing	2055A0YXXA (H)	1	PP	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DF TO LIN	DATE 02/22/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG10US-XXP-1Y-300A(H) DRAWING NO. DG10US-E01 /PART NO. SIZE A4 REV T2 04/25/09*	
	TOLERANCES EXCEPT AS NOTED		CHKD DATE		
			MFD DATE		
			APPVL DATE		
			MATERIAL :		
ANGLES ± 1°		G.E :		SCALE : 1:1	
THIRD ANGLE PROJECTION		FINISH:		DD NDT SCALE DRAWING SHEET 1 OF 1	