
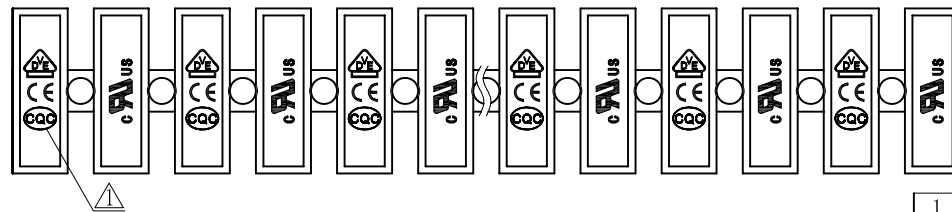
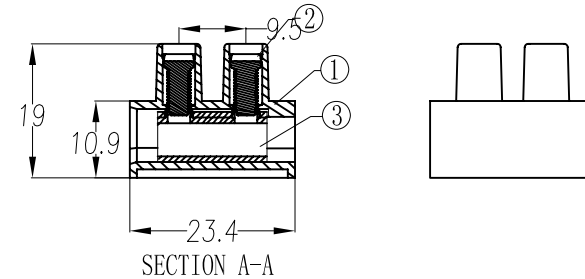
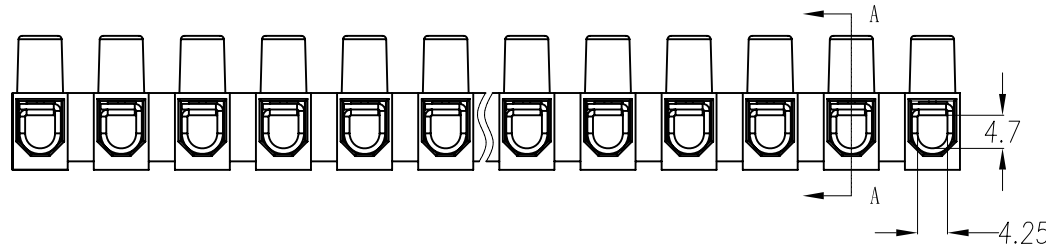


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		增加UL, CQC刻字及结构修改	Zengy	06/30/09*
△		修改UL参数	Zengy	07/14/09*

Notes:

- Pitch: 11.5mm, Poles: 2-12P
- Rated voltage/current: UL 300V/50A  
VDE 750V/57A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC3000V/1Min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 14~8AWG, 1.5~10mm<sup>2</sup>
- Max. Torque Value: M3. 5, 8. 16kgf. cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩ ∇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0 0.05/10	

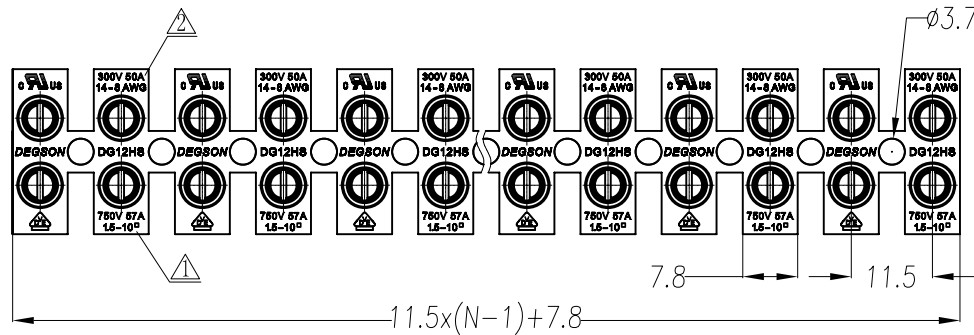

3	DG12HS Current carrier	X000003280 (H)	XX	Steel	Cr <sup>3</sup> Zn
2	DG12H Screws	S000001190 (H)	2*XX	Steel	Cr <sup>3</sup> Zn

1	DG12HS HOUSING	2024A0YXXA (H)	1	PA66	UL94V-2	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS	MM (INCH)	DF TO LIN	DATE 04/30/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: DG12HS-1.2-XXP-1Y-100A(H) DRAWING NO. DG12HS-1.2-E02 /PART NO. SIZE A3 REV T2 07/14/09*		
	TOLERANCES EXCEPT AS NOTED		CHKD			DATE
			MFD			DATE
			APPVL			DATE
			MATERIAL :			
ANGLES ± 1°		G.E :		SCALE :		
THIRD ANGLE PROJECTION		FINISH:		DD NDT SCALE DRAWING		
			SHEET 1		OF 1	