




REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		增加UL, CQC刻字	Zengy	07/14/09

Notes:


1. Pitch:11.5mm , Poles:2-12P
2. Rated voltage/current:UL 300V/50A  
VDE 750V/57A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC3000V/1min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:16~8AWG, 10mm<sup>2</sup>
7. Max. Torque Value:M3. 5, 8. 16kgf. cm
8. Undimensioned Tolerances:

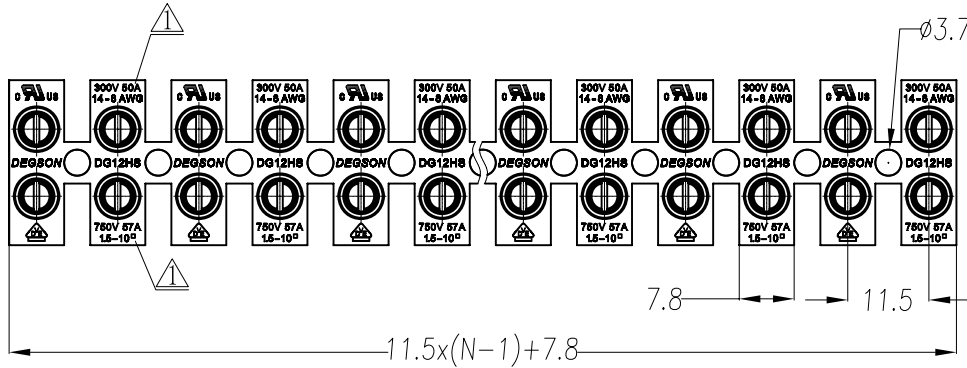

Pitch range in mm		Nominal dimension range in mm					
to	over	to	to	to	to	to	∩
6	6	10	30	60	100	150	∇
10	10	24	30	60	100	150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

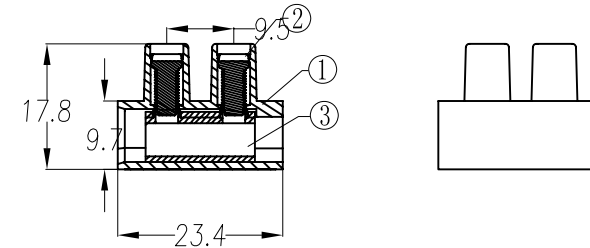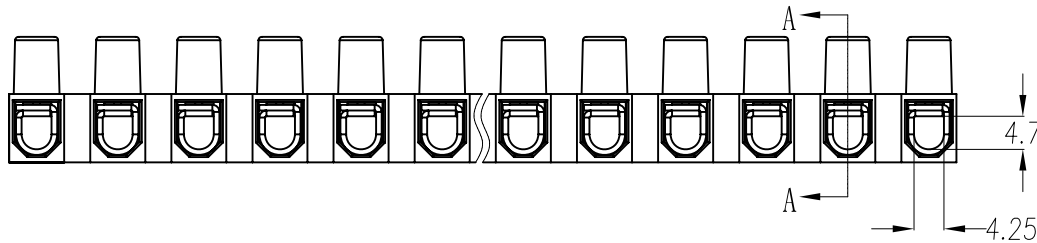

SECTION A-A

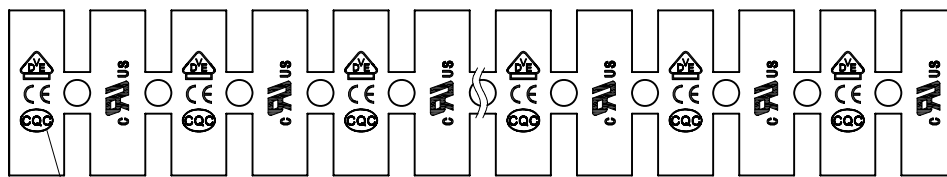

3	DG12HS Current carrier	X000003280 (H)	XX	Steel	Cr <sup>3</sup> Zn
2	DG12H Screws	S000001190 (H)	2*XX	Steel	Cr <sup>3</sup> Zn

1	DG12HS-0 HOUSING	2030A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DF TO LIN	DATE 04/30/08	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: DG12HS-0-XXP-1Y-100A(H) DRAWING NO. DG12HS-0-E02 /PART NO. SIZE A3 REV T1 07/14/09	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFD	DATE		
	.00 ±	APPLV	DATE		
	.000 ±				
ANGLES ± 1°	G.E :		MATERIAL :		
	FINISH:		SCALE :		
THIRD ANGLE PROJECTION	SCALE :		DD NDT SCALE DRAWING		
			SHEET 1	OF 1	