
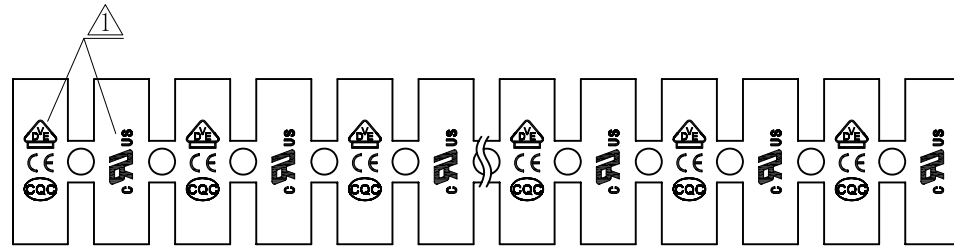
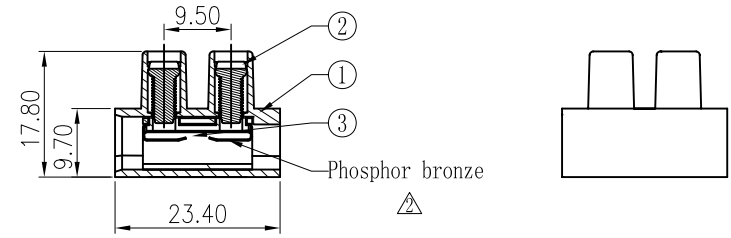
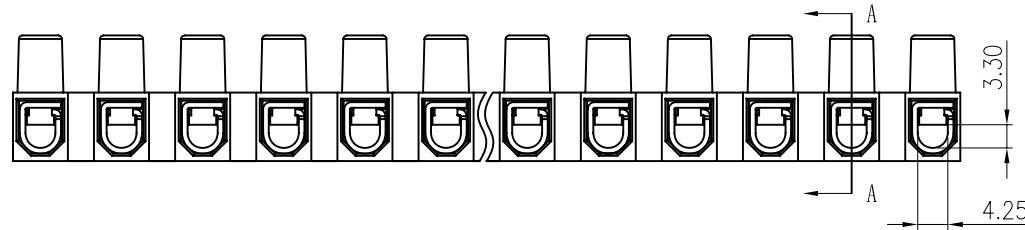


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		修改刻字	Zengy	06/30/09*
△	09-0075	增加弹片材质备注	LJH	10/05/09*
△	10-0126	增加U1刻字及参数	Lasting	08/09/10*

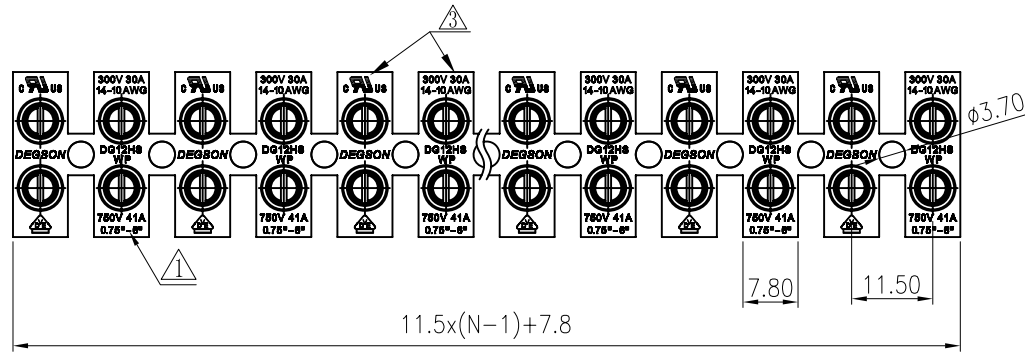

Notes:

1. Pitch:11.5mm ,Poles:2-12P
2. Rated voltage/current:UL 300V/30A
VDE 750V/41A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC3000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:14~10AWG, 0.75~6mm²
7. Max. Torque Value:M3. 5, 8. 16kgf. cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6	over 10	over 30	over 60	over 100	over 150	∅	
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

3	DG12HS Current carrier	X000003290 (H)	XX	Steel+ Phosphor bronze	Cr ³⁺ Zn
2	DG12H Screws M3. 5	S000001190 (H)	2*XX	Steel	Cr ³⁺ Zn
1	DG12HSWP-0 HOUSING	2060A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS		DF TO LIN	DATE 04/30/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
MM (INCH)		MFD	DATE		
APPVL		DATE			
MM		MATERIAL :		NAME	
.0 ±				DG12HSWP-0-XXP-1Y-100A(H)	
.00 ±				DRAWING NO. DG12HSWP-0-E01	
.000 ±				/PART NO.	
ANGLES ± 1°		G.E :		SIZE	
FINISH:				A3	
THIRD ANGLE PROJECTION		SCALE :		REV T3	
		DD NDT SCALE DRAWING		08/09/10*	
			SHEET 1		OF 1