
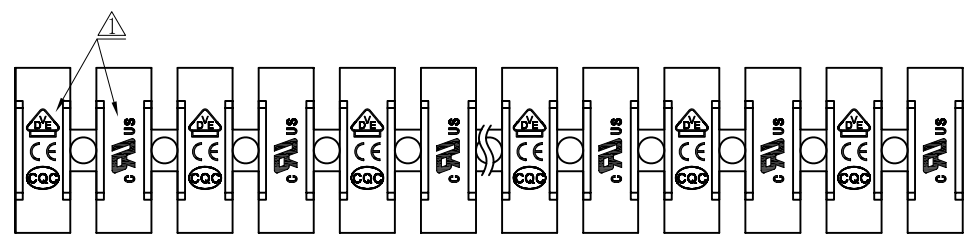
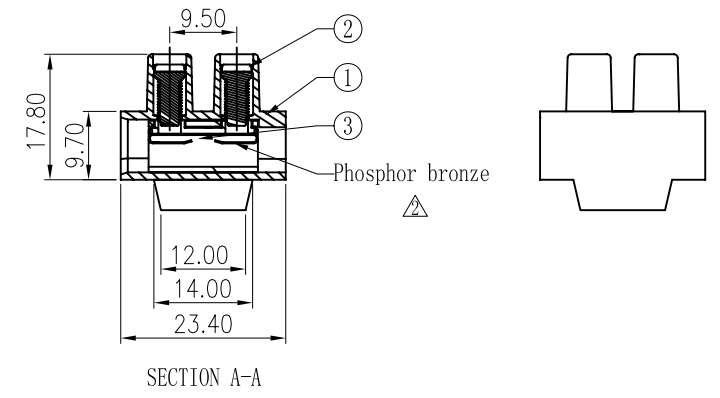
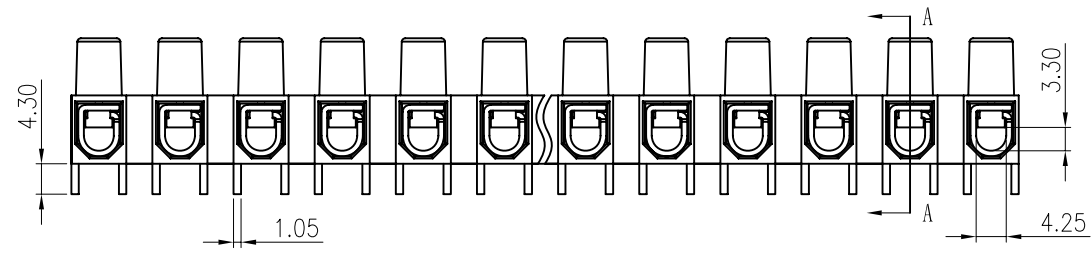


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		修改刻字	Zengy	06/30/09*
△	09-0075	增加弹片材质备注	LJH	10/05/09*
△	10-0126	增加UL刻字及参数	Lasting	08/09/10*

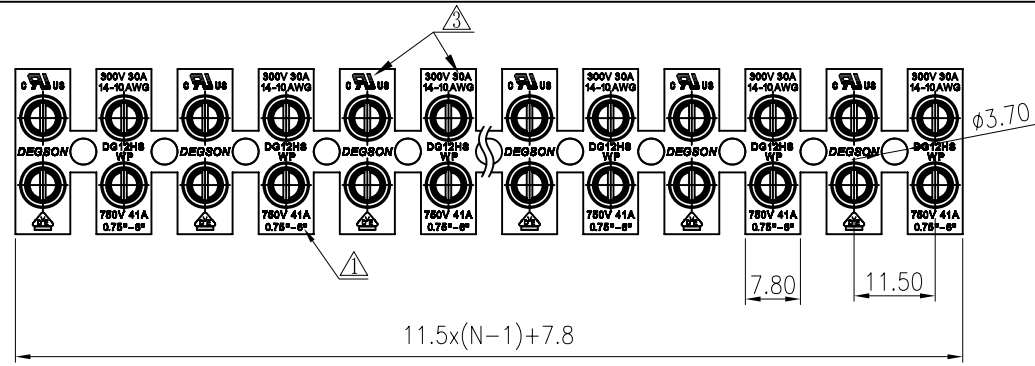

Notes:

1. Pitch:11.5mm ,Poles:2-12P
2. Rated voltage/current:UL 300V/30A
VDE 750V/41A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC3000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:14~10AWG, 0.75~6mm²
7. Max. Torque Value:M3. 5, 8. 16kgf. cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10		over 30	over 60	over 100	over 150	⌒
to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	DG12HS Current carrier	X000003290 (H)	XX	Steel+ Phosphor bronze	Cr ³⁺ Zn
2	DG12H Screws M3. 5	S000001190 (H)	2*XX	Steel	Cr ³⁺ Zn
1	DG12HSWP-4. 3 HOUSING	2066A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
NAME		DG12HSWP-4.3-XXP-1Y-100A(H)			
DRAWING NO.		DG12HSWP-4.3-E01		SIZE	REV
/PART NO.				A3	T3
				08/09/10*	
DD NDT SCALE DRAWING				SHEET 1	OF 1