

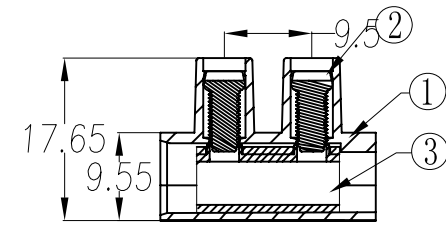
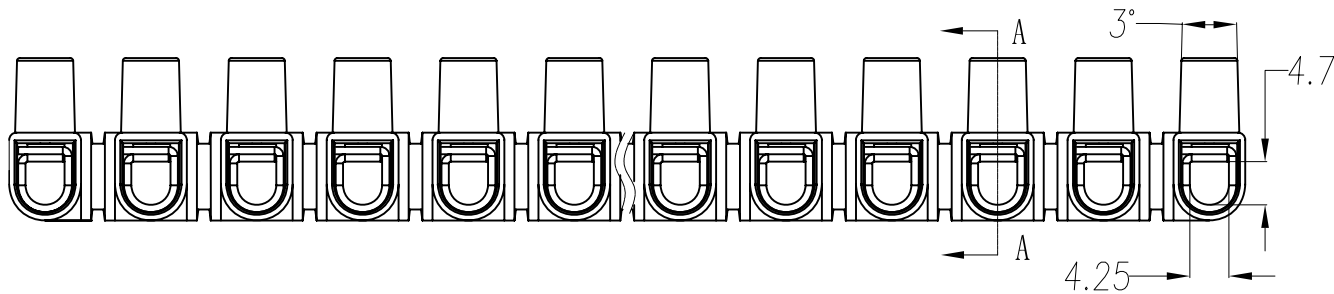


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		增加VDE刻字	Zengy	04/25/09

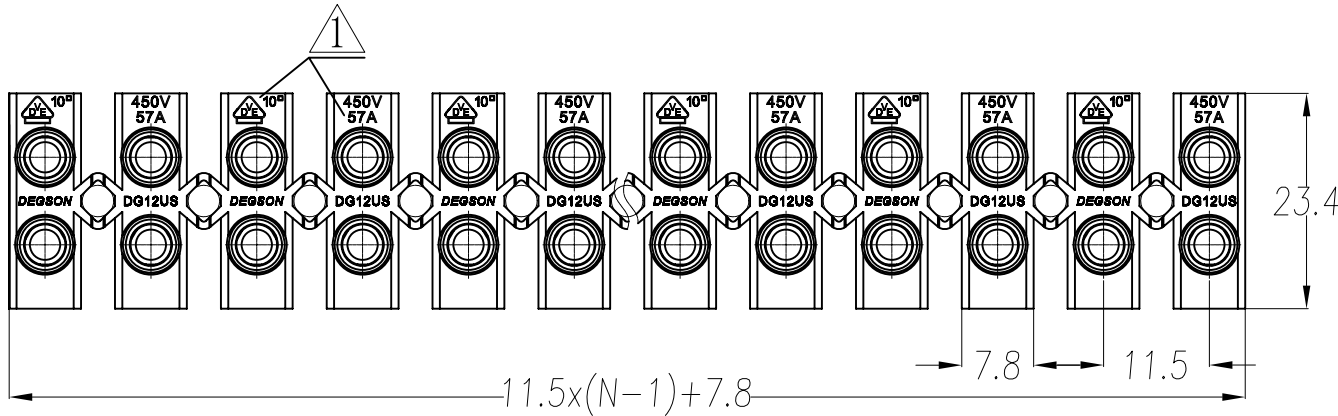

SECTION A-A

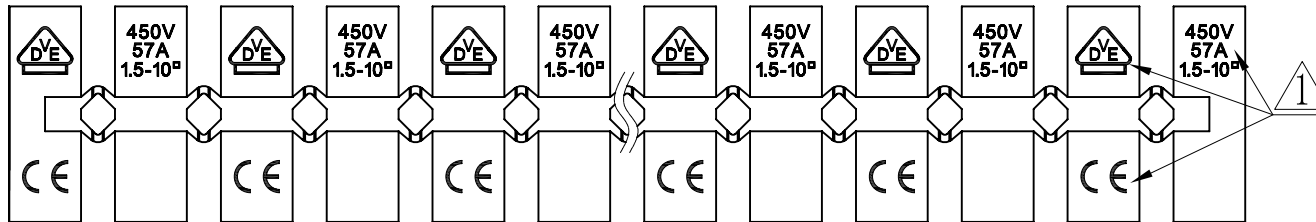

Notes:

- Pitch:11.5mm ,Poles:12P
- Rated voltage/current:UL1059 600V/30A  
VDE 450V/57A
- Operation temperatures:-5°C ~+80°C
- Withstanding Voltage:AC2500V/1min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range:12~8AWG, 1.5~10mm<sup>2</sup>
- Max. Torque Value:M3. 5, 8. 16kgf. cm
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6	over 10	to 30	over 30	over 60	over 100	over 150	—	
to 6	to 10	to 24	to 30	to 60	to 100	to 150		∩	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	∇	

3	DG12HS Current carrier	X000003280 (H)	XX	Steel	Cr <sup>3+</sup> Zn
2	DG12H Screws M3.5	S000001190 (H)	2*XX	Steel	Cr <sup>3+</sup> Zn
1	DG12US HOUSING	2056A0YXXA (H)	1	PP	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS		DF TO LIN	DATE 04/30/08	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG12US-XXP-1Y-300A(H)	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
MM (INCH)		MFD	DATE		
.00 ±		APPL	DATE		
.00 ±		MATERIAL :		DRAWING NO. DG12US-E01	
.000 ±		FINISH:		/PART NO.	
ANGLES ± 1°		SCALE :		SIZE A3	
THIRD ANGLE PROJECTION		DD NDT SCALE DRAWING		REV T1	
			SHEET 1		04/25/09