D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Notes:
1. Pitch:15.0, Poles:12P
2. Rated voltage/Current:VDE 450V 76A
3. Operation temperatures:-5℃～+80℃
4. Withstanding Voltage:AC3000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wier Range:14-6AWG, 2.5-16mm^2
7. Max. Torque Value:M4, 12.24kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

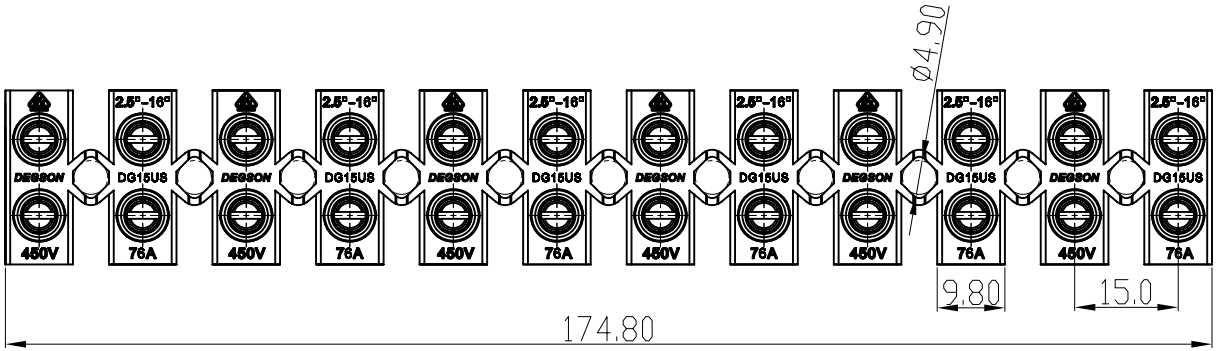

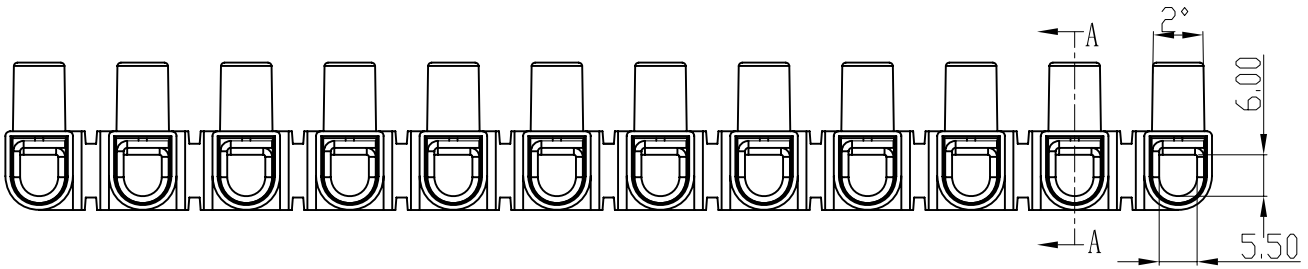

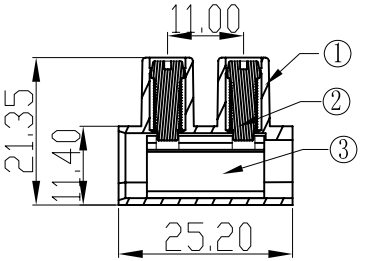

SECTION A-A

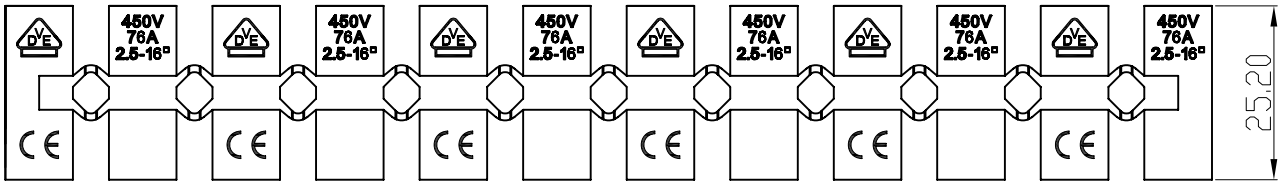

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	DG15US Housing	2057A0Y12A(H)	1	PP	UL94V-0
3	DG15HS-Current carrier	X000003400(H)	12	Steel	Cr^{3+}Zn
2	DG16H"-"Screws	S000001880(H)	24	Steel	Cr^{3+}Zn

DETACHED LISTS

MM (INCH)
TOLERANCES EXCEPT AS NOTED
MM: .0 ±, .00 ±, .000 ±
ANGLES ± 1°
THIRD ANGLE PROJECTION

DFTD LIN DATE 04/30/08
CHKD DATE
MFD DATE
APPVL DATE
MATERIAL :
G.E :
FINISH:
SCALE : 1:1

DEGSON ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD

NAME DG15US-12P-1Y-300A(H)

DRAWING NO. DG15US-E01 /PART NO.
SIZE A4
REV T0 11/03/09

DO NOT SCALE DRAWING
SHEET 1 OF 1

8 7 6 5 4 3 2 1
H G F E D C B A