D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE



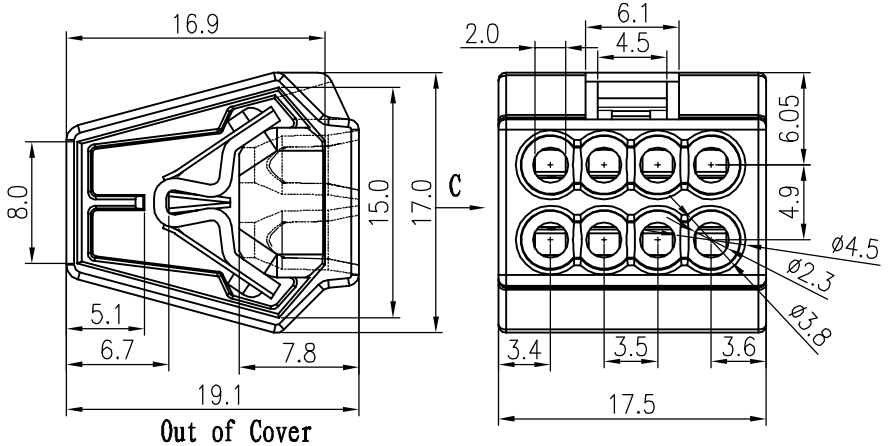

Out of Cover





Notes:

1. Pitch: 3.5mm , Poles: 05P
2. Rated voltage/current: UL1059 600V/20A
   IEC 450V/24A
3. Operation temperatures: -40℃ ~ +85℃
4. Withstanding Voltage: AC2500V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 18-14AWG 2.5mm
7. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ / ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	0.05/10



C向



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG228-3.5-08P Housing	3040A0708A(H)	1	PC	UL94V-2
2	DG228-3.5-08P-Metals	X000003870(H)	1	Fe+ Stainless steel	SnCe
3	DG228-3.5-08P Cover	3040C0301C(H)	1	PC	UL94V-2

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM
.0 ±
.00 ±
.000 ±

±
±
±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTO	Apple	DATE 03/07/09"
CHKD		DATE
MFG		DATE
APPVL		DATE
MATERIAL :		
G.E :		
FINISH :		
SCALE : 1:1		

DEGSON ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD

NAME DG228-3.5-08P-1Y-00A(H)

DRAWING NO. DG228-3.5-E08 /PART NO.

SIZE A3 | REV T0 03/18/10"

DO NOT SCALE DRAWING | SHEET 1 OF 1

8 7 6 5 4 3 2 1

H G F E D C B A