


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		DG235-3.81 脚距改为DG235W-3.81 脚距 3007B00010 (E) 改为3011B00010 (H)	WF	01/29/08*	
△		工程变更, 擦掉参数	Zengy	06/28/08*	
△		依实物修改图面	LJH	11/03/08*	

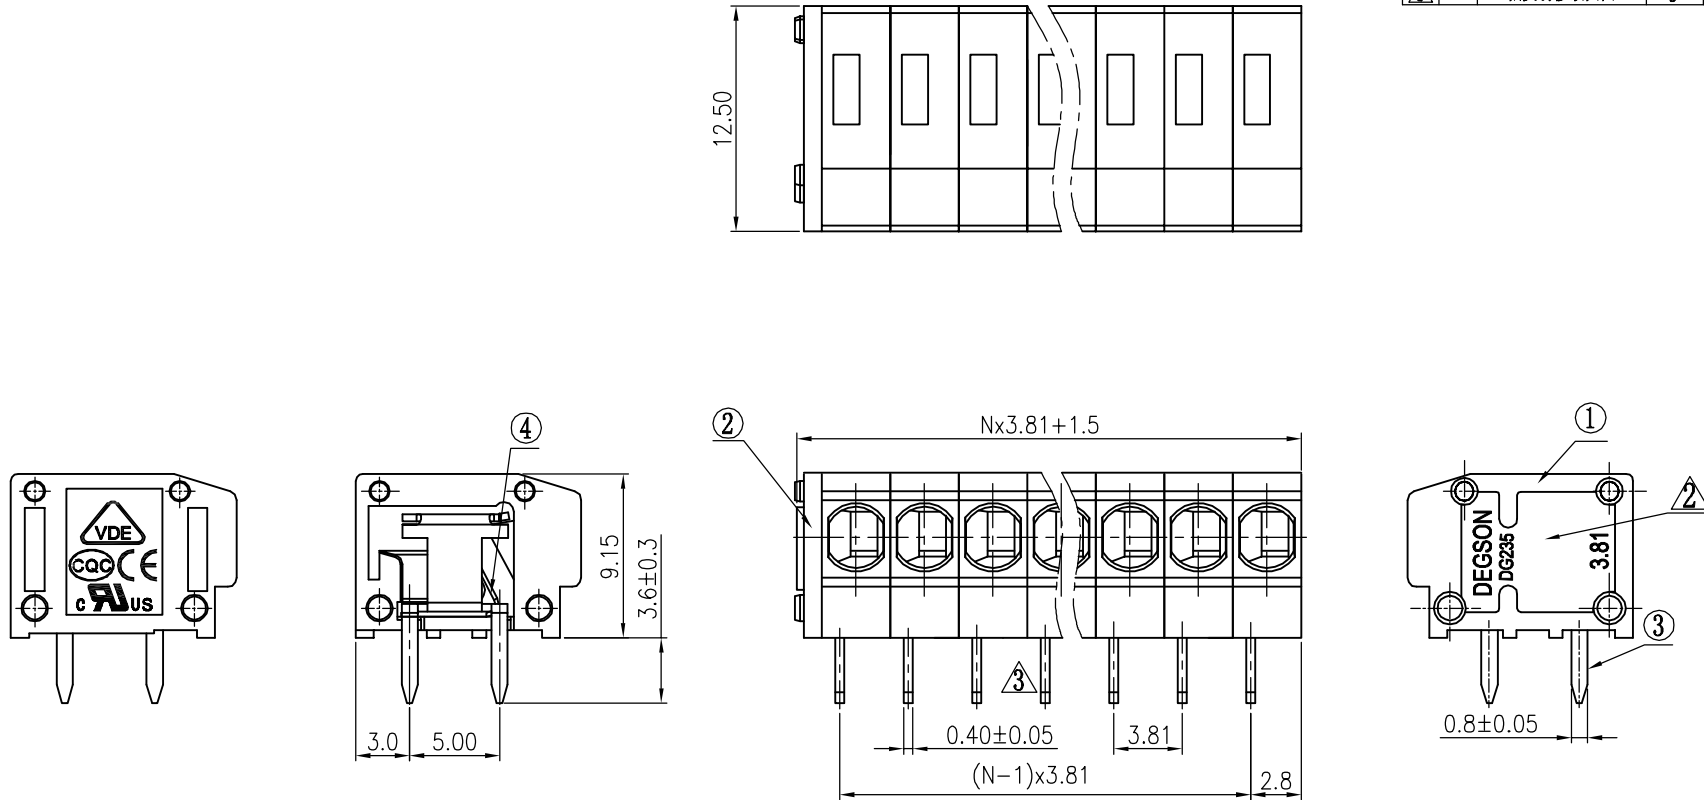

Notes:

1. Pitch: 3.08mm, Poles: 2-XXP
2. Rated voltage/current: UL 300V/5A
VDE 250V/10A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC1500V/1Min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 20~18AWG, 1.5mm²
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	to	to	over	over	over	over	
6	6	10	30	30	60	100	150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	∇

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG235-3.81-Clamp	X00000390 (H)	XX	Stainless Steel	
3	DG235W-3.81-Pin header	3011B00010 (H)	XX	Phosphor Bronze	SnCe plated
2	DG235-5.0 Cover	3008C0Y01A (H)	1	PA66	UL94V-0
1	DG235W-3.81 Housing	3011A0Y01A (H)	XX	PA66	UL94V-0

DETAILED LISTS	MM (INCH)	DFTO Zhjwmm	DATE 08/02/04	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
		MFO	DATE	
		APPVL	DATE	
	MM	MATERIAL :		NAME
	.0 ±			DG235W-3.81-XXP-1Y-00A(H)
	.00 ±			DRAWING NO. DG235W-3.81-E01
	.000 ±			/PART NO.
	ANGLES ± 1°	G.E :		SIZE A3
	THIRD ANGLE PROJECTION	FINISH :		REV T3
		SCALE : 1:1		11/03/08*
		DO NOT SCALE DRAWING		SHEET 1 OF 1