




REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加U刻字	CSX	03/16/07
△		品名、料号增加环保标识“00”	YeJ	12/08/07

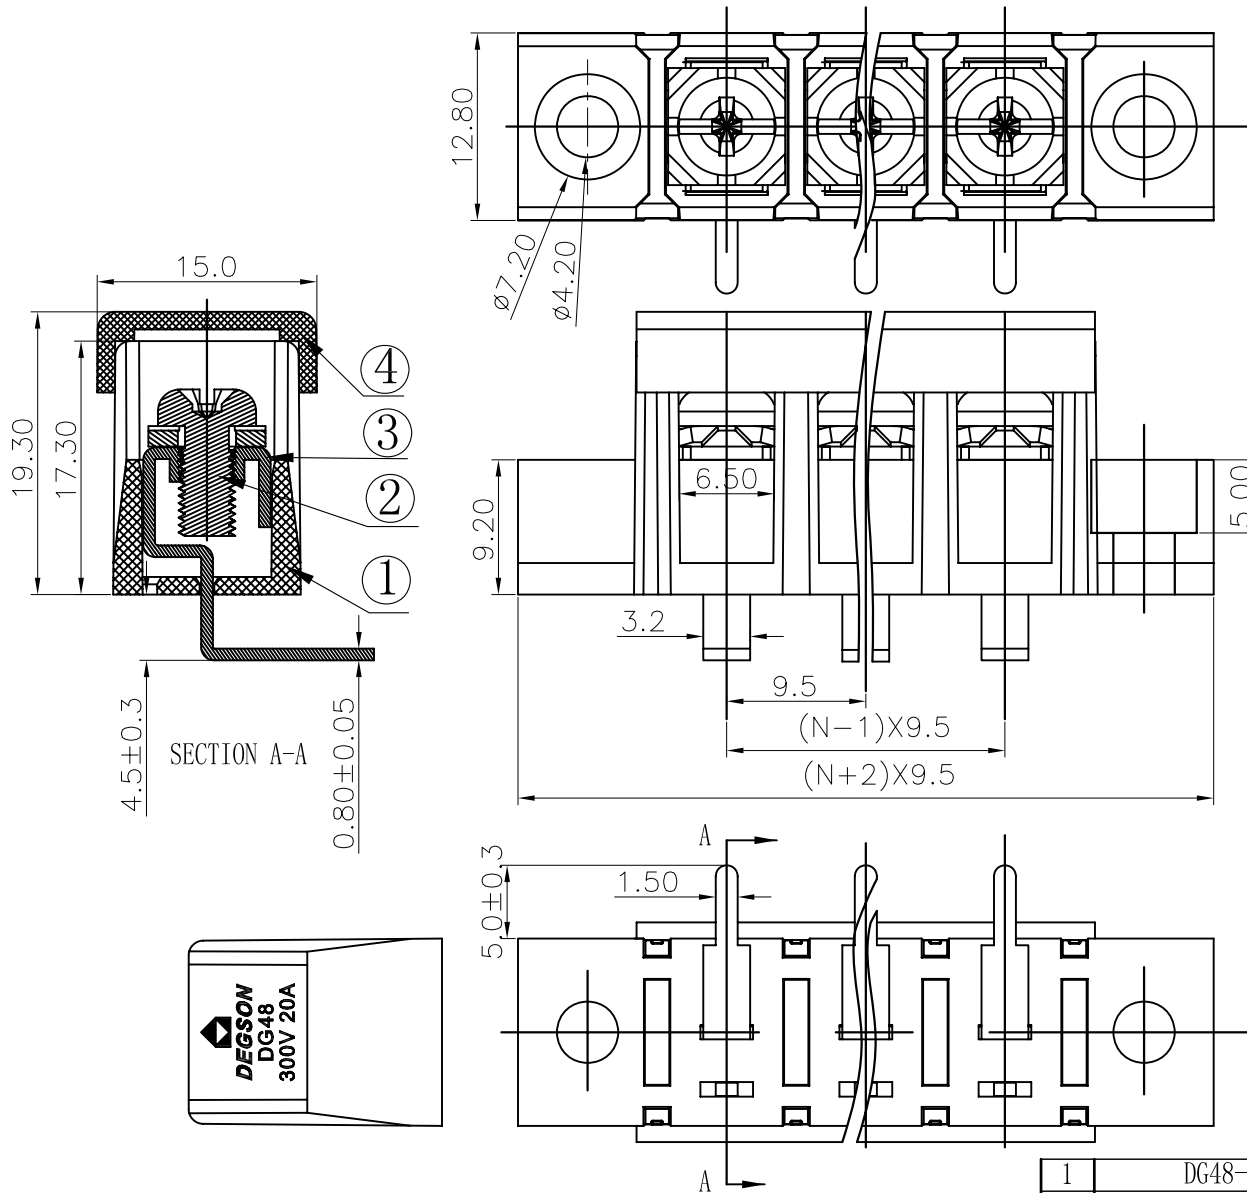

Notes:

1. Pitch: 9.5mm, Poles: 2-20P
2. Rated current: 20A
3. Rated voltage: 300V
4. Operation temperatures: -40° C ~ +105° C
5. Insulation Withstand Voltage: AC2000V/Min
6. Insulation Resistance: 500MΩ / DC500V
7. Wire Range: 22~12AWG
8. Max. Torque Value: 12.24kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over			
6	10	10	24	30	60	100	150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	□



4	DG48-Cover	5051C07XXA (H)	1	PC	
3	DG58R Pin header	5008B00060 (H)	XX	Brass	SnCe plated
2	M4*8 (7.5*7.5) bright Screws	S000000570 (H)	XX	Steel	Ni plated

1	DG48-A-Housing	5051MOYXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
	MM (INCH)	DFTO Zhuwm	DATE 01/13/06"	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	NAME	
	MM	MFO	DATE	DG48R-A-XXP-1Y-00A(H)	
	.0 ±	APPVL	DATE	DRAWING NO. DG48R-E01	
	.00 ±			/PART NO.	
	.000 ±			SIZE A3	
	ANGLES ± 1°			REV T2	
	THIRD ANGLE PROJECTION			12/08/07"	
				SCALE : 1:1	
				DO NOT SCALE DRAWING	
				SHEET 1 OF 1	