


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		25%GF更改为23%GF	CSX	03/24/06
△		脚宽由1.2变更为2.0	CSX	08/15/06
△		增加UL刻字	CSX	04/17/06
△		5034C07XXA改为 5034C07XXA	WF	05/31/07
△		品名、料号增加环保标识“印”	YeJ	12/08/07

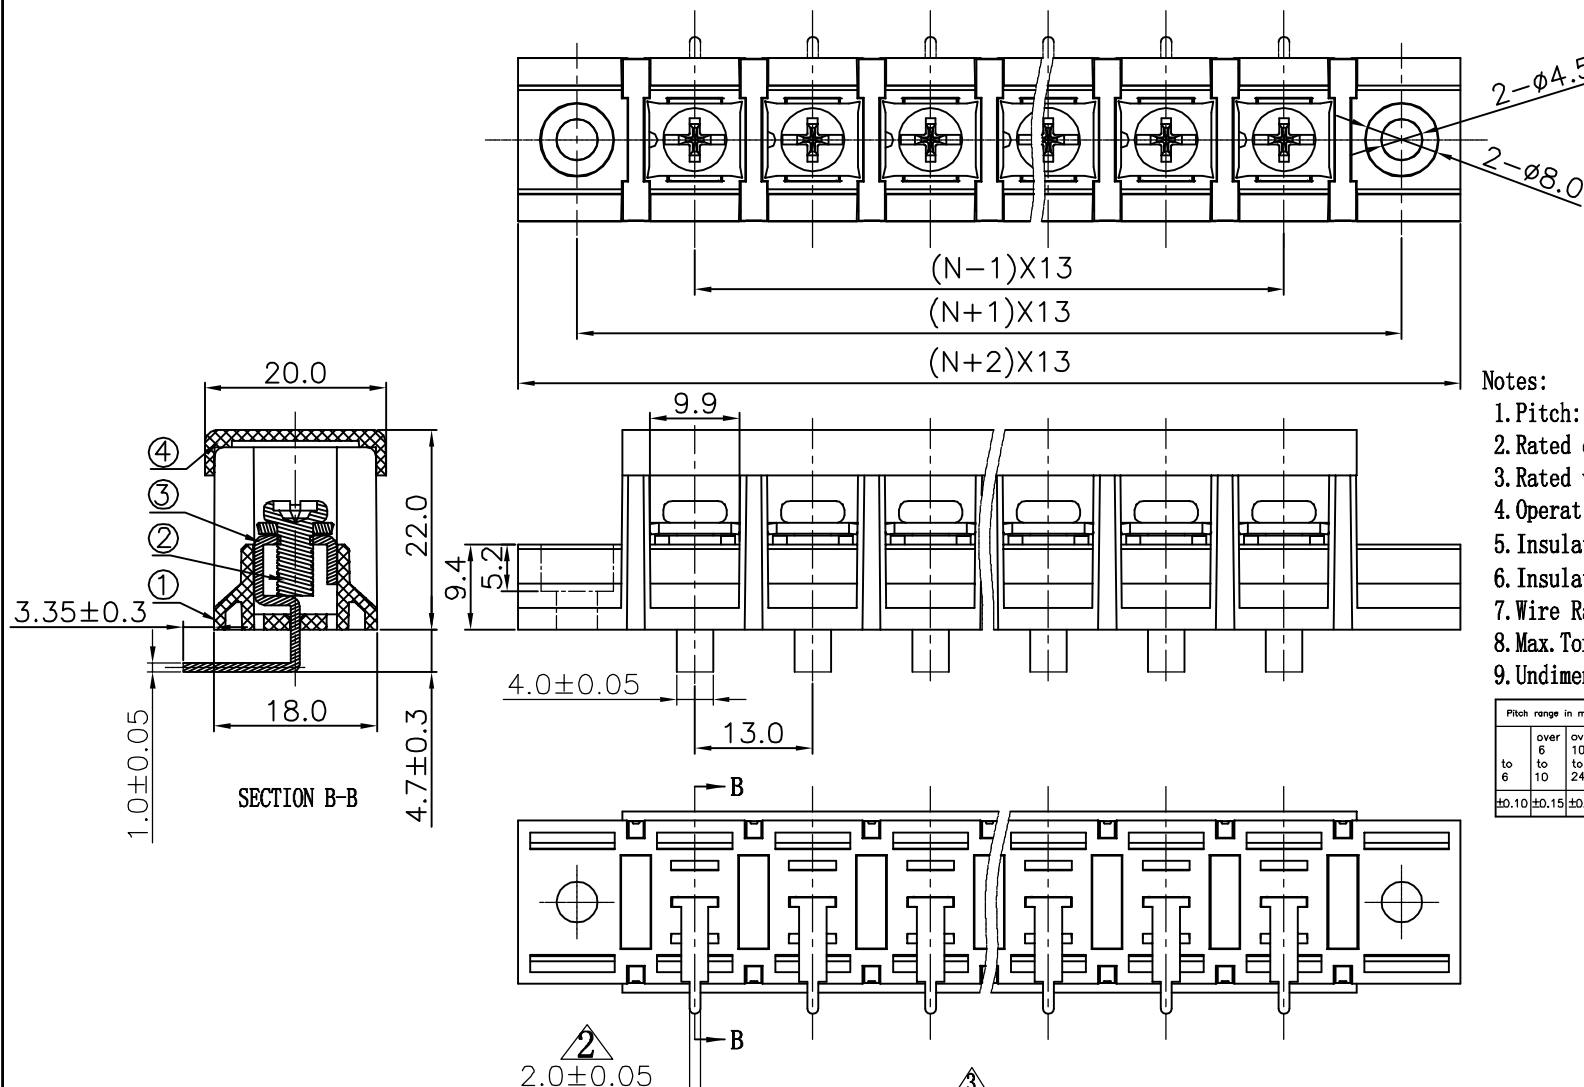

Notes:

1. Pitch:13mm , Poles:2-18P
2. Rated current:40A
3. Rated voltage:600V
4. Operation temperatures:-30° C~+120° C
5. Insulation Withstand Voltage:AC2000V/1min
6. Insulation Resistance:1000MΩ /DC500V
7. Wire Range:18~10AWG
8. Max. Torque Value:12. 24kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7
					±1.0	pos/0

4	DG78-Cover	5034C07XXA (H)	1	PC	
3	DG78R Pin header	5009B00050 (H)	XX	Brass	SnCe plated
2	M4*8 (8*10) bright Screws	S000000510 (H)	XX	Steel	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG78 Housing	5034MOYXXA (H)	1	PA66+23%GF	UL94V-0

MM (INCH)	DFTO Zhuwm	DATE 01/13/06"
TOLERANCES EXCEPT AS NOTED	CHKD	DATE
	MFO	DATE
	APPVL	DATE
MM		
.0 ±	±	
.00 ±	±	
.000 ±	±	
ANGLES ± 1°	G.E :	
FINISH :		
THIRD ANGLE PROJECTION	SCALE : 1:1	

宁波高正电子有限公司 DEGSON® DEGSON ELECTRONICS CO., LTD	
NAME DG78R-A-XXP-1Y-00A(H)	
DRAWING NO. DG78R-E01	SIZE REV A3 T5
/PART NO.	12/08/07
DO NOT SCALE DRAWING	SHEET 1 OF 1