


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		UL额定电流由15A改为20A及结构变更	HYQ	06/02/09
△		增加线径刻字	Zengy	08/03/09


Notes:

- Pitch:8.2, Poles:2-12P
- Rated voltage/Current:UL 300V/20A △
VDE 450V/32A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC2000V/1Min
- Insulation Resistance:5000MΩ/DC1000V
- Wier Range:22-14AWG, 0.5-4mm²
- Max. Torque Value:M2.5, 4.08kgf. cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
to	over	to	over	over					
6	6 to 10	30	30 to 60	100 to 150	∩				
6	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0

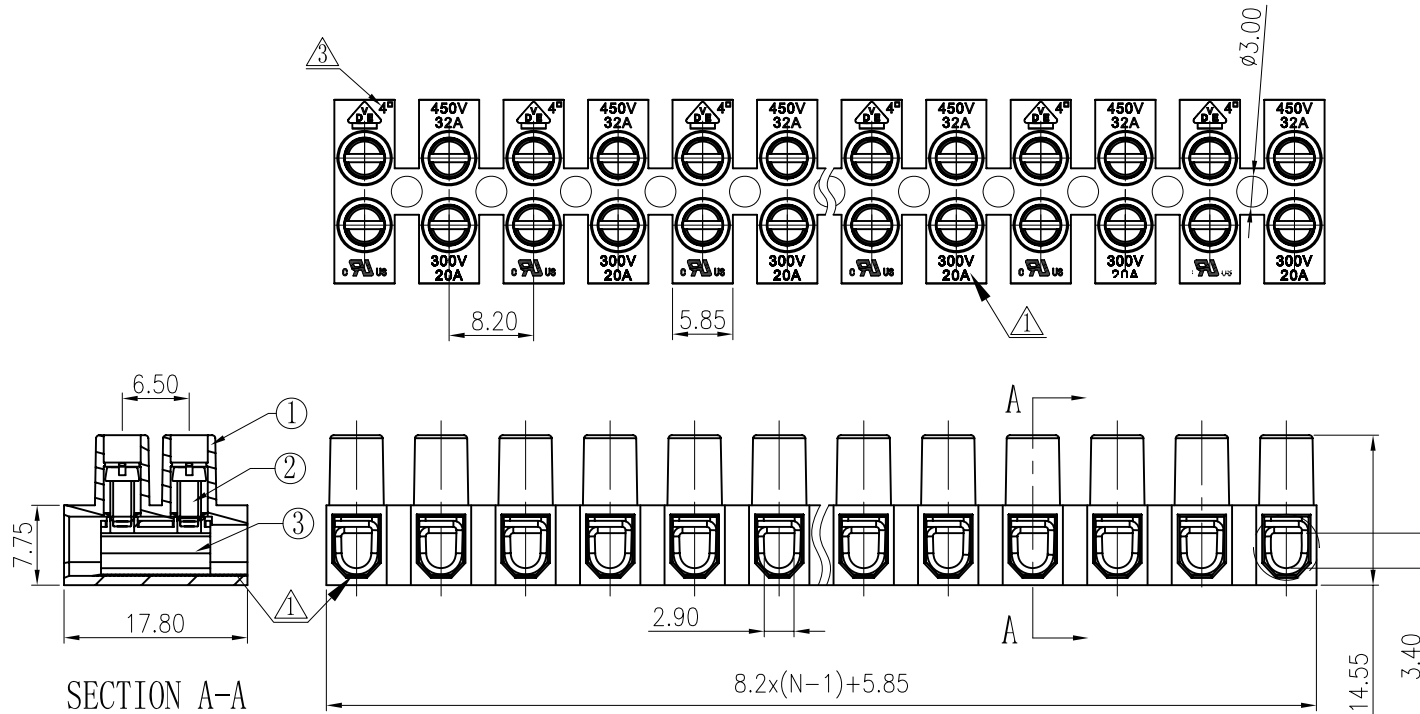

SECTION A-A

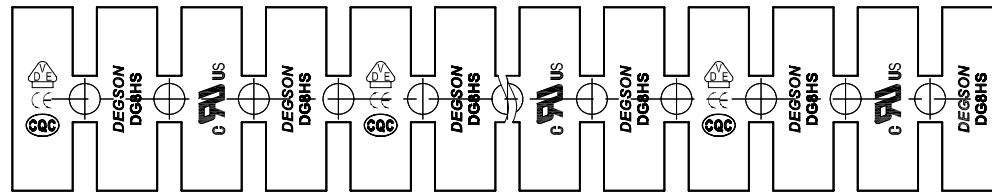

3	DG8HS-Current carrier	X000002140 (H)	XX	Steel	Cr ³⁺ Zn
2	DG8H"-Screws M2.5	S000001110 (H)	XX*2	Steel	Cr ³⁺ Zn

1	DG8HS-0 Housing	2028A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DF TO VLM	DATE 12/17/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG8HS-0-XXP-1Y-100A (H) DRAWING NO. DG8HS-0-E02 /PART NO. SIZE A4 REV T2 08/03/09*	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFD	DATE		
	.0 ±	APVPL	DATE		
.00 ±	MATERIAL :				
.000 ±	G.E :				
ANGLES ± 1°	FINISH:				
THIRD ANGLE PROJECTION			SCALE : 1:1	DD NDT SCALE DRAWING	SHEET 1 OF 1