

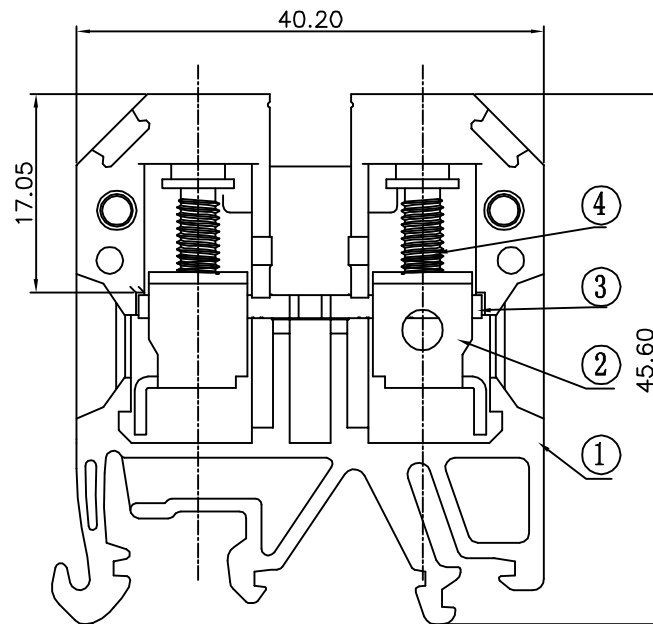



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加UL刻字	CSX	08/07/07
△		增加VDE刻字及参数	Zengy	08/07/08
△		全面修改尺寸	WLM	02/12/09

Notes:

- Rated voltage/current:UL 600V/3A
VDE 800V/41A
- Operation temperatures:-40°C~+105°C
- Withstanding Voltage:AC3000V/1Min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range:22~8AWG, 0.5~6mm²
- Max. Torque Value:M3. 5, 8. 16kgf. cm
- Undimensioned Tolerances:

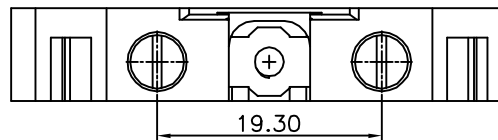

Pitch range in mm		Nominal dimension range in mm					—	
to	over	to	over	over	over	over	—	
6	6	10	10	30	60	100	150	∩
6	10	24	30	60	100	150		∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

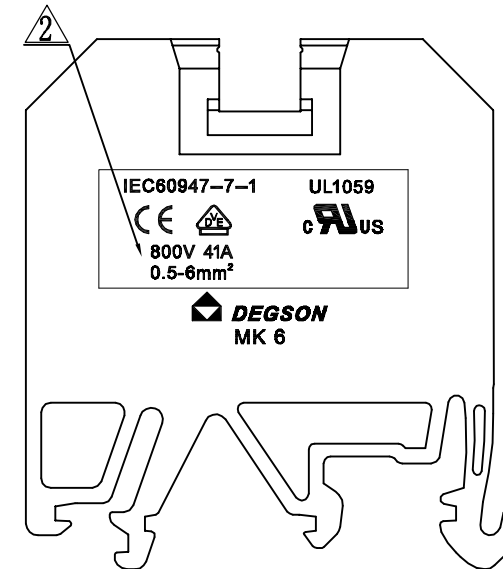

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	MK 6-housing	6018A2801A(H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO WF	DATE 07/26/06*
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE
		MFO	DATE
		APPVL	DATE
		MATERIAL :	
	ANGLES ± 1°	G.E :	
	THIRD ANGLE PROJECTION	FINISH :	
		SCALE : 1:1	

NAME		DEGSOON® 宁波高正电子有限公司 DEGSOON ELECTRONICS CO., LTD	
NAME		MK 6-01P-18-01A(H)	
DRAWING NO.	MK 6-E03	SIZE	REV
/PART NO.		A3	T3
DO NOT SCALE DRAWING		SHEET 1	OF 1

4	MK 6-screw	S000001780 (H)	2	Steel	Cr ³⁺ Zn
3	MK 6-contact	6018B00010 (H)	1	Brass	Ni plated
2	MK 6-Iron cage	X000001010 (H)	2	Iron	Cr ³⁺ Zn