
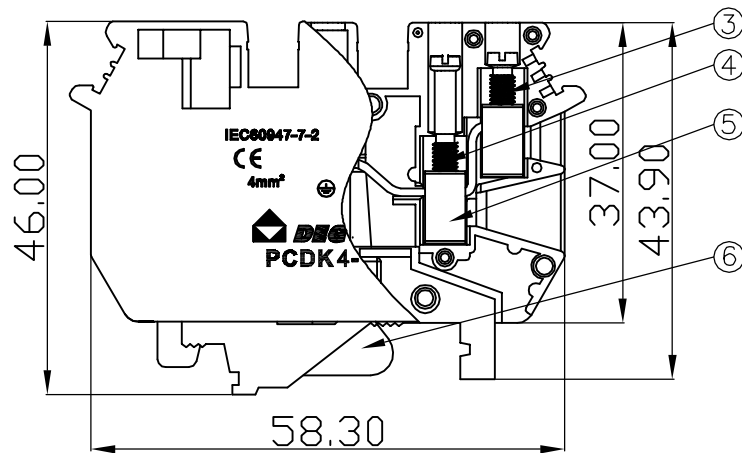
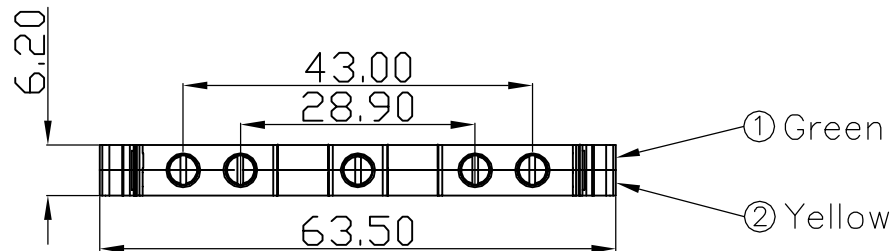


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		料号由: S000001100 → S000002530	ZYH	01/22/01*

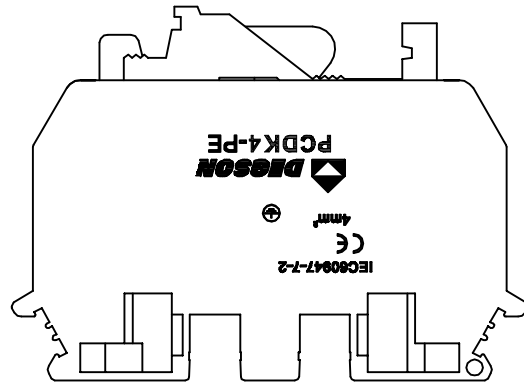

Notes:

1. Thickness/Width: 6.2/63.5mm
2. Wire Range: 24-10AWG
3. Max. Torque Value: M3, 5.1kgf.cm
4. Strip Length: 7-8mm
5. Operating temperatures: -40° C ~ +105° C
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10		over 30	over 60	over 100	over 150	∩
to 6	to 10	to 24	to 30	to 60	to 100	to 150		◇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	PCDK4-PE-Ground contact	6119B00010(H)	1			
5	PCDK4-Brass Cage	X000001840(H)	4	Brass	Ni Plated	
4	PCDK2.5 M3"-Screw	S000002580(H)	2	Brass	Ni Plated	
3	TSCB4 M3"-Screw	S000002530(H)	2	Brass	Ni Plated	
2	PCDK4-PE Housing	6119A0801A(H)	1	PA66	UL94V-0	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	PCDK4-PE Housing	6119A0401A(H)	1	PA66	UL94V-0

MM (INCH)	DF TO ZYH	DATE 11/14/05*
TOLERANCES EXCEPT AS NOTED	CHKD	DATE
	MFD	DATE
	APPVL	DATE
MM		
.0 ±	±	
.00 ±	±	
.000 ±	±	
ANGLES ± 1°	G.E :	
THIRD ANGLE PROJECTION	FINISH:	
	SCALE : 1:1	

DEGSON		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
NAME PCDK4-PE-01P-1Y-00A(H)			
DRAWING NO. PCDK4-PE-E01		SIZE A4	REV T1 01/22/01*
/PART NO.		DO NOT SCALE DRAWING	SHEET 1 OF 1