


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

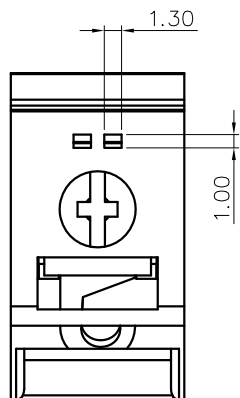

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 20A
- 2.Torque Value : M4 , 10.53Lb.in
- 3.Wire Range : 20~12AWG

IEC Standard




- 1.Rated Voltage/Current : 250V / 32A
- 2.Torque Value : M4 , 1.2N·m
- 3.Wire Range : 0.75~4mm<sup>2</sup>

NOTES2:


- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Poles : N=01P
- 3.Stripping length : 8~10mm
- 4.Withstanding Voltage : AC2000V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						-	∩	∇
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO	Over TO	0.1/10		
6	6 TO 10	10 TO 24	30 TO 30	30 TO 60	60 TO 100	100 TO 150	150	<		
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

7.RoHS Compliance

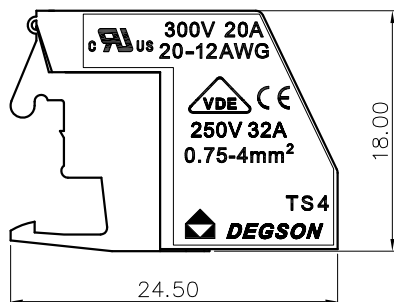

TS 4 - 01P - 1Y - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color):1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)



DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	<p>THIRD ANGLE PROJECTION</p>		<p>DRAWING NO.:</p>		<p>REV</p>
<p>MM (INCH)</p>		<p>DO NOT SCALE DRAWING</p>		<p>SHEET</p>	
				<p>DO</p>	
				<p>SCALE</p>	
				<p>1/1</p>	
				<p>1:1</p>	

宁波高松电子有限公司  
 NINGBO DEGSON ELECTRICAL CO., LTD

TS 4-01P-1Y-00A(H)

CUSTOMER DRAWING

1/1

1:1