

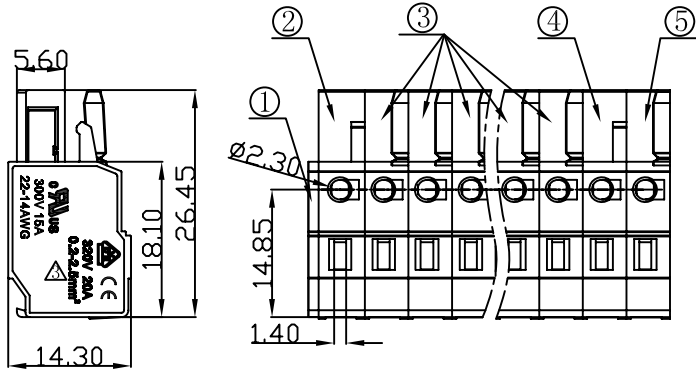
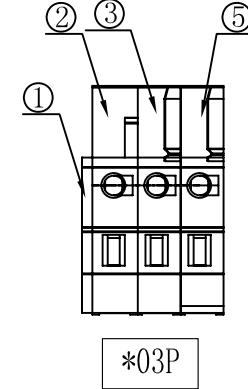
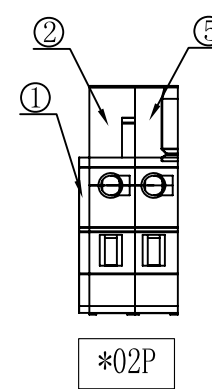




| REVISION RECORD | | | | |
|-----------------|-------|----------------|----------|----------|
| REV | ECD | DESCRIPTION | DRFT | DATE |
| △ | | 修改拼脚 | HXG | 01/09/09 |
| △ | | 图面更新 | HXG | 02/17/09 |
| △ | 0-030 | 增加VDE, CE刻字及参数 | Jordan.Y | 09/06/10 |

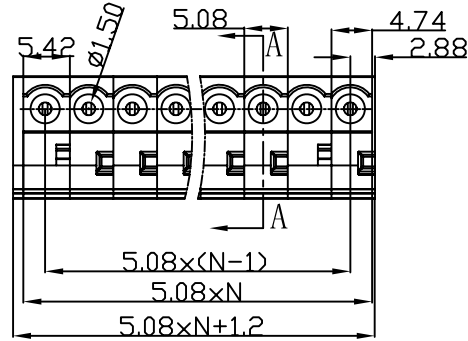

Notes:

- Pitch: 5.08mm
- Rated voltage/current: UL 300V/15A
VDE 320V/20A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ / DC1000V
- Wire Range: 28~12AWG, 2.5mm²
- Undimensioned Tolerances:

| Pitch range in mm | | Nominal dimension range in mm | | | | | |
|-------------------|--------------|-------------------------------|---------------|----------------|-----------------|----------|--------|
| to 6 | over 6 to 10 | to 24 | over 30 to 60 | over 60 to 100 | over 100 to 150 | over 150 | ∩ ◇ |
| ±0.10 | ±0.15 | ±0.25 | ±0.2 | ±0.3 | ±0.5 | ±0.7 | ±1 |
| | | | | | | | 0.05/0 |

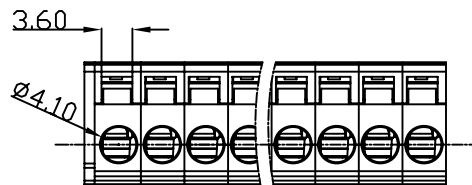

| 2 | 8EDGK-5.08-HOUSING (边件1) | 1124A0Y01D<H> | 1 | PA66 | UL94V-0 |
|------|--------------------------|---------------|------|----------|---------|
| 1 | 8EDGK-5.0-COVER | 1086C0Y01A<H> | 1 | PA66 | UL94V-0 |
| ITEM | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTES |

| | | | | | |
|----------------|----------------------------|---------------------------|----------------------------|---|--|
| DETACHED LISTS | MM (INCH) | DFTD LYK | DATE 09/14/07 | 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD | |
| | TOLERANCES EXCEPT AS NOTED | CHKD | DATE | | |
| | | MFD | DATE | | |
| | | APPVL | DATE | | |
| | NAME | 8EDGK-5.08-XXP-1Y-00A (H) | | | |
| | ANGLES ± 1° | G.E | DRAWING NO. 8EDGK-5.08-E01 | | |
| | THIRD ANGLE PROJECTION | FINISH: | /PART NO. | | |
| | | SCALE : | DO NOT SCALE DRAWING | | |
| | | | SHEET 1 OF 1 | | |

| | | | | | |
|---|---------------------------|---------------|------------------------------|-----------------|------------|
| 7 | DG242-SPRING | X000000990<H> | XX | Stainless Steel | |
| 6 | 8EDGK-CLAMP | 1086B00010<H> | XX | Phosphor Bronze | Tin plated |
| 5 | 8EDGK-5.08-HOUSING (边件2) | 1124A0Y01C<H> | 1 | PA66 | UL94V-0 |
| 4 | 8EDGK-5.08-HOUSING (中间件2) | 1124A0Y01B<H> | 1, (XX≥4) 0, (XX≤3) | PA66 | UL94V-0 |
| 3 | 8EDGK-5.08-HOUSING (中间件1) | 1124A0Y01A<H> | XX-3, (XX≥4) XX-2, (XX≤3) | PA66 | UL94V-0 |